

## **386EX-Card III**

### Technical Manual

## **taskit GmbH**

**Seelenbinderstr. 33  
D-12555 Berlin  
Germany**

**Tel +49 (30) 611295-0  
Fax +49 (30) 611295-10  
<http://www.taskit.de>**

© *taskit* Rechnertechnik GmbH, Berlin

All rights reserved. This document and the products referred to herein are copyrighted works of *taskit* Rechnertechnik GmbH. Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form, without the express written permission of *taskit* Rechnertechnik GmbH. If however, your only means of access is electronic, permission to print one copy is hereby granted. Neither *taskit* Rechnertechnik GmbH nor *taskit's* distributors assume any liability arising from the use of this manual or any product described herein.

# 386EX-Card III

---

<b>1. INTRODUCTION .....</b>	<b>7</b>
<b>2. OVERVIEW OF TECHNICAL PROPERTIES .....</b>	<b>8</b>
2.1. CPU .....	8
2.2. MEMORY .....	8
2.3. FIRMWARE .....	8
2.4. INTERFACES .....	8
2.5. POWER MANAGEMENT .....	8
2.6. MISCELLANEOUS .....	8
<b>3. 386EX-CARD III STARTER KIT "MINIPC" .....</b>	<b>9</b>
3.1. START-UP .....	9
3.2. 386EX-CARD III DRIVES .....	9
3.3. ACCELERATION OF THE BOOT PROCEDURE .....	9
3.4. MAPPING PC DRIVES WITH REMOTE-DRIVE .....	10
3.5. CONFIGURING THE BIOS .....	10
<b>4. PROGRAMMING THE 386EX-CARD .....</b>	<b>11</b>
4.1. USE OF PC COMPILERS .....	11
4.2. ACCESSING PIF PERIPHERALS .....	11
4.3. TESTING PROGRAMS .....	11
4.3.1. <i>Debugging on the PC</i> .....	11
4.3.2. <i>Remote debugging</i> .....	11
<b>5. HARDWARE .....</b>	<b>12</b>
5.1. 386EX CORE .....	12
5.2. MEMORY .....	12
5.2.1. <i>RAM</i> .....	12
5.2.2. <i>Flash memory</i> .....	12
5.3. REAL-TIME CLOCK .....	13
5.4. TCU (TIMER/COUNTER UNIT) .....	13
5.5. MAX690A - SUPERVISORY CIRCUIT .....	14
5.5.1. <i>System Reset</i> .....	14
5.5.2. <i>Non-Maskable Interrupt (NMI)</i> .....	14
5.5.3. <i>Battery Backup for SRAM and Real Time Clock</i> .....	14
5.5.4. <i>Watchdog</i> .....	15
5.6. INTERRUPT CONTROLLER .....	15
5.6.1. <i>General</i> .....	15
5.6.2. <i>Edge and level triggering</i> .....	15
5.6.3. <i>Assigned interrupt vectors</i> .....	15
5.6.4. <i>Masking of interrupts</i> .....	15
5.6.5. <i>Resetting the interrupt controller</i> .....	15
5.6.6. <i>Non-Latching of IRQs</i> .....	16
5.6.7. <i>Spurious interrupt</i> .....	16
5.6.8. <i>IRQ priority</i> .....	16
5.7. DMA CONTROLLER .....	17
5.8. ASYNCHRONOUS SERIAL INTERFACES .....	17
5.8.1. <i>Signals of the serial interfaces</i> .....	17
5.8.2. <i>BIOS functions</i> .....	17
5.8.3. <i>Hardware interrupt of the serial interfaces</i> .....	17
5.8.4. <i>UART register</i> .....	18
5.9. SYNCHRONOUS SERIAL INTERFACE .....	19
5.10. ETHERNET .....	20
5.10.1. <i>Initialization</i> .....	20
5.10.2. <i>Packet Driver</i> .....	20
5.10.3. <i>MAC Address</i> .....	20
5.10.4. <i>TCP/IP Drivers</i> .....	20
5.11. I/O PORTS .....	21
5.11.1. <i>Processor ports</i> .....	21
5.12. I2C BUS .....	21
5.13. PIF BUS .....	22
5.13.1. <i>Overview</i> .....	22

# 386EX-Card III

5.13.2. Hardware design for the PIF bus .....	22
5.13.3. PIF bus Mechanics.....	22
5.13.4. PIF bus signals.....	23
5.13.5. PIF bus timing (Write) .....	24
5.13.6. PIF bus timing (Read) .....	25
5.14. COMPACTFLASH.....	26
5.15. POWER MANAGEMENT .....	26
5.15.1. Changing the CPU clock rate.....	26
5.15.2. Idle mode.....	26
5.15.3. Power-down mode .....	26
5.15.4. Deep power-down mode.....	27
<b>6. PC PROGRAMS .....</b>	<b>28</b>
6.1. VTERM32.....	28
6.1.1. File transfer with VTERM .....	28
6.2. VTERM FOR DOS .....	28
6.2.1. Command-line parameters.....	28
6.2.2. VTERM commands .....	28
6.2.3. File transfer with VTERM .....	29
6.3. FLASHHDD.....	29
6.4. ROMDRV .....	29
6.5. BIN2HEX .....	29
6.6. HEX2BIN .....	29
<b>7. 386EX-CARD III PROGRAMS.....</b>	<b>30</b>
7.1. MAPPING REMOTE DRIVES WITH RDRIVE, RMAP AND RMCWD .....	30
7.2. XLOAD .....	30
7.3. XSEND.....	30
7.4. ZTRANS.....	30
<b>8. BIOS SETUP .....</b>	<b>32</b>
8.1. MAIN SETUP.....	32
8.2. ADVANCED SETUP .....	32
8.3. I/O CONFIGURATION SETUP .....	33
8.4. FLASH SETUP.....	33
8.5. EXIT SETUP .....	34
<b>9. BIOS - REFERENCE .....</b>	<b>35</b>
9.1. INT 10H - VIDEO SERVICE .....	35
9.1.1. INT 10h Function 00h - Set video mode .....	35
9.1.2. INT 10h Function 02h - Set cursor position .....	35
9.1.3. INT 10h Function 03h - Get current cursor position.....	35
9.1.4. INT 10h Function 06h/07h - Scroll current page up/down .....	35
9.1.5. INT 10h Function 09h - Write char/attribute to screen.....	35
9.1.6. INT 10h Function 0Ah - Write character to screen .....	35
9.1.7. INT 10h Function 0Eh - Write teletype to screen.....	36
9.2. INT 11H - EQUIPMENT CHECK SERVICE .....	36
9.3. INT 12H - MEMORY SIZE .....	36
9.4. INT 13H - DISK SERVICES .....	36
9.4.1. INT 13h Function 01h - Read disk status.....	36
9.4.2. INT 13h Function 02h - Read disk sectors .....	36
9.4.3. INT 13h Function 03h - Write disk sectors.....	37
9.4.4. INT 13h Function 08h - Read drive parameter .....	37
9.5. INT 14H - FUNCTIONS OF THE ASYNCHRONOUS SERIAL INTERFACES .....	37
9.5.1. INT 14h Function 00h - Initialize Serial Interface .....	37
9.5.2. INT 14h Function 01h - Send character.....	38
9.5.3. INT 14h Function 02h - Receive character .....	38
9.5.4. INT 14h Function 03h - Query the status of a serial interface .....	38
9.5.5. INT 14h Function 04h - Extended Initialization .....	38
9.6. INT 15H - SYSTEM SERVICES .....	39
9.6.1. INT 15h Function 24h - A20 gate control.....	39
9.6.2. INT 15h Function 87h - Move memory block.....	39
9.6.3. INT 15h Function C0h - Get system config table.....	39

# 386EX-Card III

9.6.4. INT 15h Function A1h - Int 10h / Int 16h redirect I/O.....	39
9.7. INT 15H FUNCTION C3H - FUNCTIONS SPECIFIC TO THE 386EX-CARD III.....	39
9.7.1. INT 15h Function C301h – Enable Watchdog .....	39
9.7.2. INT 15h Function C302h – Reset Watchdog .....	39
9.7.3. INT 15h Function C310h – Query processor clock rate .....	39
9.7.4. INT 15h Function C311h – Set processor clock rate .....	40
9.7.5. INT 15h Function C312h – Set CPU in idle mode .....	40
9.7.6. INT 15h Function C313h – Set CPU in power-down mode .....	40
9.7.7. INT 15h Function C314h – Synchronous serial interface: Send.....	40
9.7.8. INT 15h Function C315h – Synchronous serial interface: Receive .....	41
9.7.9. INT 15h Function C320h – Reading EEPROM.....	41
9.7.10. INT 15h Function C321h – Writing EEPROM.....	41
9.7.11. INT 15h Function C322h - I2C bus: Read byte with address byte .....	41
9.7.12. INT 15h Function C323h - I2C bus: Write byte with address byte.....	41
9.7.13. INT 15h Function C324h - I2C bus: Read data block with 2 address bytes.....	41
9.7.14. INT 15h Function C325h - I2C bus: Write data block with 2 address bytes.....	42
9.7.15. INT 15h Function C326h – Request I2C bus.....	42
9.7.16. INT 15h Function C327h – Enable I2C bus .....	42
9.7.17. INT 15h Function C328h – I2C Bus: Read byte with 2 address bytes .....	42
9.7.18. INT 15h Function C329h - I2C bus: Write byte with 2 address bytes.....	42
9.7.19. INT 15h Function C32Ah – I2C bus: Read byte .....	42
9.7.20. INT 15h Function C32Bh - I2C bus: Write byte .....	43
9.7.21. INT 15h Function C32Ch - I2C bus: Read two bytes.....	43
9.7.22. INT 15h Function C32Dh - I2C bus: Write two bytes.....	43
9.7.23. INT 15h Function C32Eh - I2C bus: Read data block.....	43
9.7.24. INT 15h Function C32Fh - I2C bus: Write data block.....	43
9.7.25. INT 15h Function C330h – Query hardware serial number.....	43
9.8. INT 16H - KEYBOARD SERVICE.....	44
9.8.1. INT 16h Function 00h - Read keyboard input.....	44
9.8.2. INT 16h Function 01h - Read keyboard status .....	44
9.8.3. INT 16h Function 05h – Simulate pressing of a key .....	44
9.9. INT 17H - PARALLEL SERVICE .....	44
9.9.1. INT 17h Function 00h - Print character.....	44
9.9.2. INT 17h Function 01h - Initialize printer.....	44
9.9.3. INT 17h Function 02h - Get printer status.....	45
9.10. INT 18H - BOOT FAILURE .....	45
9.11. INT 19H - BOOT SYSTEM.....	45
9.12. INT 1Ah - CLOCK AND TIMER FUNCTIONS .....	45
9.12.1. INT 1Ah Function 00h - Read system timer.....	45
9.12.2. INT 1Ah Function 01h - Set system timer.....	45
9.12.3. INT 1Ah Function 02h - Read real-time clock.....	45
9.12.4. INT 1Ah Function 03h - Set real-time clock .....	46
9.12.5. INT 1Ah Function 04h – Read RTC date .....	46
9.12.6. INT 1Ah Function 05h – Set RTC date .....	46
9.12.7. INT 1Ah Function 06h – Set / Enable RTC interrupt.....	46
9.12.8. INT 1Ah Function 07h – Disable RTC interrupt.....	46
9.12.9. INT 1Ah Function 08h : Synchronize system timer.....	47
9.12.10. INT 1Ah Function 09h : Set cyclical interrupt.....	47
9.13. INT 1Bh TO 1Fh.....	47
9.14. INT 5Fh - FLASH SERVICES.....	47
9.14.1. INT 5Fh Function 00h - Erase Flash block .....	47
9.14.2. INT 5Fh Function 01h - Read Flash block .....	47
9.14.3. INT 5Fh Function 02h - Write Flash block .....	47
9.14.4. INT 5Fh Function 03h - Erase and write Flash block.....	48
9.14.5. INT 5Fh Function 04h - Read Flash chip and manufacturer ID.....	48
<b>10. TABLES .....</b>	<b>49</b>
10.1. I/O ADDRESSES .....	49
10.2. INTERRUPT TABLE .....	50
10.3. CONNECTORS .....	52
10.3.1. Connector X1: PIF-Bus .....	52
10.3.2. Connector X2: I/O .....	52
10.3.3. Connector X3: COM2, synchronous serial port (SSIO), DMA.....	52

# 386EX-Card III

---

10.3.4. Connector X6: JTAG / I <sup>2</sup> C-Bus.....	53
10.3.5. Connector X8: Ethernet Twisted Pair.....	53
10.4. ANSI ESCAPE SEQUENCES USED BY THE BIOS .....	54
10.5. ELECTRICAL DATA .....	55
<b>11. DRAWING 386EX-CARD III .....</b>	<b>56</b>

### 1. Introduction

The 386EX-Card III is a small size DOS PC. It is especially suited for applications with restricted energy and space requirements, and where a PC-compatible solution is desired.

Examples of applications:

- mobile data-recording equipment
- LCD terminals
- measurement and testing equipment
- alarm installations
- any simple (or more complex) automation task

The 386EX-Card III can be programmed like a DOS PC with all of the usual DOS compilers, such as Borland or Microsoft C, Pascal and Basic, among others. Creating a program is thus very easy. Since the terminal program displays the PC's drives as drives of the 386EX-Card III, the developer can directly start .EXE files on the host PC. Or the EXE file can be copied to the Flash disk and started from there. A starter kit is included for ease of implementation; it contains a developer board with a power supply and the necessary software.

The BIOS setup contains extensive options for memory configuration, serial interfaces and I/O ports. Additional serial interfaces are thus also supported by the BIOS. The I/O pins can be adjusted individually or in groups to input or output, in part also with interrupt function. Hardware initializations for peripherals can be defined in the BIOS Setup. In addition, the BIOS setup menu contains the functions for loading ROM-DOS or BIOS updates, as well as for saving to or deleting the Flash disk.

## 2. Overview of Technical Properties

### 2.1. CPU

- Intel 386EX embedded processor (extension of the 386SX)
- 66,6 MHz maximum clock rate
- 5V operating voltage

### 2.2. Memory

- up to 8 MB flash memory (standard version: 2MB) with flash file system
- up to 4 MB static RAM (standard version: 1MB)  
up to 896kB DOS main memory  
RAM may be supported by external battery during power off
- 512 bytes serial EEPROM, 256 of them available for user program

### 2.3. Firmware

- PC-compatible BIOS, includes configuration menu in BIOS setup
- Datalight ROM-DOS (optional)

### 2.4. Interfaces

- two PC-compatible serial interfaces (8250-compatible), maximum of 781.25 kBaud (= 25 MHz/32), or 115.2 kBaud as maximum PC-compatible Baud rate, TTL voltage levels
- PIF-Bus
- Synchronous Serial Interface, up to 6.25 MBaud (= 25 MHz / 4)
- I<sup>2</sup>C Bus
- Up to 13 digital I/O ports, programmable individually as input or output
- 6 IRQ lines externally available
- Real-time clock (RTC) alarm output
- Timer clock, timer gate and timer output signals

Some of the various functions are realized by multiplexing signals; therefore not all functions may be used at the same time (see table in chapter 10).

### 2.5. Power Management

Energy consumption can be drastically reduced by the power management functions of the BIOS in many instances.

- Downclocking,
- Idle mode
- Power-down mode
- Deep power-down mode (stop mode)

Energy consumption:

- Active: 135 mA (at 25 MHz)
- Idle mode: 9 mA
- Power-down: 4 mA
- Deep power-down: 0,3 mA

### 2.6. Miscellaneous

- three 8254-compatible timers, two of them freely available for applications
- two 8259-compatible interrupt controllers
- two DMA channels
- Real Time Clock (RTC) with battery backup
- programmable watchdog timer
- unique hardware serial number (can be used by programs for copy protection).
- available with extended temperature range, -20°C ... +85°C
- dimensions: 93 x 54 x 5 mm (WxDxH)



### 3. 386EX-Card III Starter Kit "MiniPC"

A space-saving housing protects the CPU card and makes it easy to handle. You can connect external peripherals to the starter kit's standard connectors without opening the housing.

Simply attach COM1 of the MiniPC to a host PC and start the terminal program. The 386EX-Card boots from the Flash disk and a DOS prompt appears. You can then copy data and programs from the host PC onto the 386EX-Cards RAM or Flash disk quickly and easily.

The starter kit consists of:

- 386EX-Card III without Ethernet, 2MB Flash, 1MB SRAM
- Operating system: FreeDOS, compatible to MS-DOS 7.1
- Utility programs: VTERM terminal program, FLASHHDD to create flashdisk image files, and others
- Serial "nullmodem" cable
- Wall Cube Power Supply
- MiniPC housing, 4x RS232 interfaces, 1x parallel interface
- Optional Bundle: Datalight Sockets (TCP/IP Stack including FTP and HTTP servers, Datalight ROM-DOS)

#### 3.1. Start-up

In the subdirectory UTIL you will find the terminal program VTERM.EXE, which can be started without additional parameters. If using a COM port other than COM1, you can select a new COM port by typing Alt-C. With Alt-H you get an overview of the terminal program's commands (see also chapter 6.1.2). The Baud rate of the 386EX-Card III normally is equal to 115200 Baud.

**Note:** If the ACPI function of the power management of the host PC are enabled, communication from the PC to the 386EX-Card III will not work under certain conditions. In this case, ACPI must be disabled beforehand.

Connect the 386EX-Card III's 10-pin COM1 (X3) connector is connected to a free serial interface (COM port) of the PC using the serial cable and the adaptor cable. If a serial cable other than the one provided is used, it must be a null modem cable ("crossover cable"). The cable that comes with the starter kit supports only TxD and RxD. The signals CTS and DCD are each connected with RTS on the same end, inside the connector; in other words, they are not conducted to the other end of the cable.

Attach the power supply to the DC connection next to the serial ports. With a correct installation you can now observe the BIOS booting. After the memory test, DOS will boot and the 386EX-Card III will display a DOS prompt. From the DOS prompt, you can work with the 386EX-Card III as you are accustomed to working with a desktop PC.

#### 3.2. 386EX-Card III Drives

The 386EX-Card offers several "drives". Drive A: is a ROM disk, drive B: a RAM disk, drive C: a flashdisk (from which the 386EX-Card III boots according to the standard settings) and drive D: a CompactFlash module (optional). These drives can be accessed like floppy disk drives or hard disk drives. Drives A:, B: and D: are deactivated by default but can be activated in the BIOS setup. The RAM disk (drive B:) can then be used immediately. In order to be able to use drive A:, a ROM disk image must first be loaded via the BIOS setup.

#### 3.3. Acceleration of the Boot Procedure

When the ROM-DOS is booting, the F5 key circumvents the execution of CONFIG.SYS and AUTOEXEC.BAT, and the F8 key permits individual execution of each command. The ROM-DOS waits a few seconds for a keyboard entry. You can avoid this delay through the command

*switches=/f*

at the beginning of the CONFIG.SYS file. However, interrupting the boot process by F5 or F8 is then more difficult (although still possible).

If the option "Boot Messages" in the BIOS Setup is turned off and "Fast Boot" is turned on, the complete boot procedure of the 386EX-Card III will take less than two seconds.

### 3.4. Mapping PC Drives with Remote-Drive

Exchanging program or data files between the PC and the 386EX-Card III might take place with any terminal program supporting the X-Modem or Z-Modem data transmission protocol. In addition, the more specialised terminal program VTERM, which comes with the 386EX-Card III, provides the possibility of integrating PC drives (remote drives) into the DOS of the 386EX-Card III. Standard DOS commands and DOS functions can therefore be used to access files on the host PC. The MAP.BAT file on the flash disk contains examples of how to initialize the appropriate drivers. Details can be found in the chapter about RDRIVE.

### 3.5. Configuring the BIOS

Communication takes place via the 386EX-Card III's first serial interface. The baud rate is normally set to 115200 Baud. Configuration of the card is done in the BIOS setup. In order to start the BIOS setup, the "S" key must be pressed during the boot process.

**Note:** Some settings, e.g. switching off the standard I/O port, can disable any access to the 386EX-Card III. In such a case, standard settings can temporarily be restored by shorting Pin 19 ("PIF Ready") of X2 to ground while booting. The BIOS setup is then activated automatically, allowing the correction of the settings.

This possibility can be turned off with the setting "Emergency Jumper: disabled" in order to prevent unauthorized access to the software. However, this should only be done if the final status of an application is reached.

The supply voltage should never be turned off during storage of the setup values, since otherwise the BIOS will be erased. Storing the setup values takes a few seconds, and afterwards the card reboots.

### 4. Programming the 386EX-Card

#### 4.1. Use of PC Compilers

Because it is DOS compatible and for the most part PC compatible, the CPU card can be programmed just like a normal DOS PC. That is to say, the usual programming tools for the PC, so far as they are suitable for DOS programs, can also be used for the 386EX-Card III. Basic, Pascal and "C" are particularly apropos.

Certain restrictions must be considered regarding console (video) output. The respective compiler must be configured in such a way that the output is made by DOS or BIOS calls. Only then can the output be redirected to the serial interface, which represents the 386EX-Card III's console port. Programs that access the video memory directly — a popular method of DOS compilers because it is fast — are normally not possible on the 386EX-Card III (for some LCDs there are BIOS extensions that use the 386 processor's virtual 8086-mode to intercept accesses to the VGA chip and video memory, converting them in an appropriate way).

#### 4.2. Accessing PIF Peripherals

The PIF bus works "I/O mapped", meaning that it is addressed by using the 386EX processor's IN and OUT commands. The address space of the PIF-Bus comprises the 64 I/O addresses from 300 to 33Fh. The data bus of the PIF bus is 8 bits wide.

#### 4.3. Testing Programs

##### 4.3.1. Debugging on the PC

Programs for the 386EX-Card III should be tested as far as possible on the development PC, since PC development environments and debuggers can be used there without limitations. Accessing peripheral hardware that needs the PIF-bus interface can be done with the PIF-ISA-Base interface card. This card occupies one ISA-bus slot (a PCI card is not currently available). Its hardware addresses and IRQ can be flexibly configured. This method works for all PIF I/O cards.

##### 4.3.2. Remote debugging

An effective method for debugging source code directly on the 386EX-Card III is the remote kernel of Borland's Turbo-Debugger. For this method, one of the two serial interfaces of the 386EX-Card III must be reserved exclusively for the debugger — any other activities on the same interface disturbs communication between the remote kernel and the host program. The remote kernel (tdremote.exe) is copied to the Flash disk of the 386EX-Card III and started from there.

## 5. Hardware

### 5.1. 386EX Core

The CPU core of the Intel 386EX constitutes a fully static 386SX. Its data bus is 16 bits wide, and its address bus 26 bits (386SX: 24 bits) wide. An address space of 64 Mbyte memory and 64 kByte I/O is available. The processor core supports protected-mode applications.

### 5.2. Memory

#### 5.2.1. RAM

##### 5.2.1.1. RAM layout

The 386EX-Card III can be equipped with 512KB or 1MB SRAM. The starter-kit 386EX-Card III is equipped with 1MB SRAM. This memory is accessible in the processor's "Real Mode", and thus in the lowest MB. The range between 896KB and 1MB is excluded — this is the area where the part of the flash memory with the BIOS (48KB), the ROM-DOS kernel (48KB), and optionally a BIOS extension (maximally 32KB) reside. If necessary, this flash range can also be set to 256KB or 512KB, so that only a maximum of 768KB or 512KB RAM are available in the lowest MB.

So, when equipped with 1MB SRAM, at least 128KB are not addressable in Real Mode. The entire RAM is however also made available in the second MB of the address space (as "Extended Memory") and can be addressed there with protected-mode functions (BIOS INT 15h, function 87h).

##### 5.2.1.2. Battery backup

The static RAM and the real time clock IC (RTC) can be powered by a backup battery. The RAM maintains its contents when the operating voltage is turned off, and the real time clock keeps running. This backup power is supplied by means of the I/O connector's Vbatt pin.

The minimal voltage for the SRAM and RTC is 2V. With a lithium cell of 3.2 V, SRAM and RTC together draw about 2  $\mu$ A (typical value). No battery current is drawn when the normal operating voltage of 3.3V is on.

##### 5.2.1.3. Goldcap

Instead of a battery, a "Goldcap" can also be used, in other words a capacitor with particularly large capacity (e.g. 1F). Data can be held over several hours. The advantage over a battery is in the relatively maintenance-free operation. The Goldcap's charging current may be supplied from Vcc during normal operation, e.g. by way of a diode with series resistor to limit the voltage.

#### 5.2.2. Flash memory

##### 5.2.2.1. Flash memory layout

The 386EX-Card III can be equipped with 1MB, 2MB or 4MB Flash memory. This is organized in blocks of 64KB, which can be erased individually. The BIOS and ROM-DOS kernel occupy 96KB of the flash memory, while 32KB are reserved for optional BIOS extensions. The remainder is available as flash disk, ROM disk, or as freely usable memory for application programs. The BIOS functions of Int 5Fh exist for this purpose.

A part of the Flash memory, namely 128KB, 256KB or 512KB (including BIOS and ROM-DOS), can be made accessible within the real mode address space. Program code residing within this location can be executed directly from flash memory. Of course, this part of the address space is no longer available for RAM.

##### 5.2.2.2. Limited number of erase cycles

Flash memory consists of "Large Sector Flash-ICs" (e.g. AMD's 29LV016 or compatible). Only a limited number of erase cycles per block are tolerable for these devices (usually 100000 or one million erase cycles are guaranteed by the manufacturer). This means that the flash memory, in particular the flash disk, is not suitable for permanent write operations of a program, since the permissible

number of erase cycles per block might be exceeded in a relatively short time. A RAM disk must be used for such purposes.

### 5.2.2.3. Flash disk

The largest section of the Flash memory is usually occupied by the Flash disk. This is organized like a hard drive, and is accessed by the ROM-DOS by means of the BIOS functions of Int 13h. By default, the files COMMAND.COM of the ROM-DOS operating system as well as some utility programs for serial data communication (RDRIVE, XLOAD, XSEND) are stored on the flash disk. Typically, the application program and application data will also reside on the flash disk.

The 386EX-Card III's Flash file system is extremely stable against sudden power failures, to which battery-operated devices particularly easily succumb. The flash file system will work reliably even if a power failure took place during flash disk operations. However, "lost clusters" may possibly arise, if files were still open under DOS. These can be deleted with the DOS utility program CHKDSK.

### 5.2.2.4. Creation of a new Flash disk

- Create a directory on the PC for all files which are to appear later on the Flash disk.
- Copy all necessary files into this directory. Among these should be at least COMMAND.COM and a program for data communication (RDRIVE.EXE, RMAP.EXE or XLOAD.COM). In addition one can create the appropriate CONFIG.SYS and AUTOEXEC.BAT files here.
- Create a flash image file with the program FLASHHDD.EXE according to the description in the chapter "PC Programs".
- Start the terminal program and the 386EX-Card III, and press the < S > key during the memory test. You will arrive at the CPU card's setup menu.
- By pressing < L > , choose the **FLASH** menu. From here, select the function **Update Flashdisk** and confirm with < Enter >. The confirmation question must be answered with "Y". The BIOS deletes the flash disk range and then waits for the file transfer (this can be recognized by appearance of the "\$" characters). Then send the flash image file with the terminal program (ALT+ < S > with Vterm). To do so, select the transmission protocol „X-Modem“ and enter the path of the flash image file. A few seconds after completion of the transfer the card will reboot.

## 5.3. Real-Time Clock

The real-time clock ("RTC") provides date and time for application programs. Leap years and a 24-hour mode are both accounted for. As on a PC, the RTC can generate an interrupt (IRQ 8). Besides the usual scheduled interrupt (interrupt at a certain pre-programmed time), the RTC can also release a cyclical interrupt at every minute, hour, or day, or with 1Hz or 4096 Hz. As on a PC, the BIOS functions for the RTC are available at Int 1Ah for reading and programming.

The RTC can be supplied with backup power via the Vbatt pin of the 386EX-Card III's connector so that it keeps running if the 386EX-Card III's power supply is switched off.

The active-low RTC interrupt signal (open-drain output) is on the I/O connector of the 386EX-Card III (Wakeup) and can be used to trigger actions of the peripherals. This also functions in the deep power-down mode (with the CPU oscillator turned off), but the power supply to the 386EX-Card III must remain switched on. The Wakeup signal can also be used as an external interrupt input if the RTC interrupt is not needed.

## 5.4. TCU (Timer/Counter Unit)

The TCU is widely compatible with the 8254 from Intel (and thus with PC standards). Further details about the timer can be found in the 386EX processor manual from Intel.

Properties of the 8254:

- three 16-bit timers,
- six counter modes,
- BCD or binary numbers,
- separate interrupts for each timer (IRQ 0, 10 and 11),
- clock source internally or externally selectable (only for Timer 0 and 1).

**Timer 0** is programmed by the BIOS according to PC standard in mode 3 to achieve an output frequency of 18,206 Hz (periodic timer interrupt, system timer). Its output is connected to IRQ0. The BIOS interrupt routine increments the 32-Bit timer variable at RAM address 0040h:006Ch each time it is called. This variable serves as the basis for the DOS system time.

**Timer 1** (responsible for the DRAM Refresh on a normal PC) and likewise also **Timer 2** (for the loudspeaker on a PC) are freely available. On the 386EX-Card III, Timer 1 and Timer 2 can also generate an interrupt (IRQ 10 and 11).

Timer 0 and Timer 1 can be operated with an internal or external clock. Timer 2 can be operated only with internal clock. The internal clock is produced by a prescaler from the CPU clock. The prescaler can be adjusted to values from 2 to 513. The BIOS sets the value of the prescaler in such a way that the clock is somewhat slower than the timer clock of a PC (1.193182 MHz), i.e. than the next higher whole number to the quotient from the CPU clock and 1.193182 MHz. For 25MHz, this gives a prescaler of 21 and a timer input clock of 1.19047 MHz. When downclocking the CPU clock by the BIOS Int 15h function C311h, the prescaler is adapted appropriately.

See table 10.3.2. for an overview of the timer signals available on connector X2.

The signals of Timer 0 and Timer 1 are multiplexed with other functions. The appropriate settings can be made in the BIOS I/O Setup (see 8.3).

## 5.5. MAX690A - Supervisory Circuit

The Max690A supervisory chip takes care of various important system functions, such as processor reset, watchdog timer, power supply monitoring, battery control, etc. The following functions are implemented on the 386EX-Card:

### 5.5.1. System Reset

A 150ms reset pulse is generated on power-up, power-down and on brownout conditions. The duration of the reset pulse is independent from the rise time of the supply voltage.

The reset output goes low when the supply voltage drops below 4.65V. This disables any activity of the CPU.

### 5.5.2. Non-Maskable Interrupt (NMI)

A non-maskable interrupt can be generated when a power failure occurs. The supply voltage can be monitored via two resistors (R24/R23) which are connected to the power fail input (PFI) of the Max690A. When the voltage at PFI falls below 1.3V, the power fail output (PFO) drives the processor's NMI input low. If the unregulated DC input of an external 5V regulator is used for monitoring, the NMI will be generated early enough to save important data to the SRAM before the regulated voltage drops below 4.65V. In order to monitor an unregulated external DC voltage, it must be connected to input VUNST (I/O-connector pin 23).

Example: the minimum for the unregulated input of a 5V regulator is usually 9V. For a threshold of 8V the values of R20/R21 can be calculated in the following way:

$$\begin{aligned} 8V/1.3V &= (R24 + R23) / R23 \\ \text{Set } R23 \text{ to } 1 \text{ kOhm } \dots & \quad R24 = 1 \text{ kOhm} * (8V / 1.3V - 1) \\ & \quad R24 = 5.1 \text{ kOhm} \end{aligned}$$

If R24/R23 are used for monitoring the supply voltage, resistor R22 should be removed. Resistor R21 can be used to add hysteresis. The monitoring function can be disabled by connecting the PFI input to Vcc via the pull-up resistor R22.

### 5.5.3. Battery Backup for SRAM and Real Time Clock

An onboard lithium battery (A1 on the PCB), a gold-cap (C10) or an external battery (pin VBATT on the I/O-connector X2) may be used to provide the backup voltage for SRAMs and real time clock (RTC). The minimum backup voltage for SRAM and RTC is 2V. At the standard lithium battery voltage of 3.2 V, SRAM and RTC will draw only 1.5 µA (typical value).

In case of a power failure the supply voltage for the SRAMs and for the RTC will be switched over to the backup battery. This ensures that the RTC will continue to run and that the contents of the SRAM including the RAM disk will be preserved during this condition.

If a rechargeable battery or a gold-cap is used instead of a lithium battery, resistor R18 is necessary for recharging. **R18 must be removed if a lithium battery is used !**

### 5.5.4. Watchdog

The watchdog timer can be enabled by software on the 386EX-Card. When the watchdog timer is active, it must be reset at least once each 1.6 seconds to prevent a system reset. The watchdog timer can be started, stopped or reset with INT 15h Function C3h of the BIOS.

## 5.6. Interrupt Controller

### 5.6.1. General

Like a normal PC, the 386EX processor has two on-chip 8259-compatible programmable interrupt controllers (PICs). Thereby 15 interrupt requests (IRQs) are available, some of which are already taken up by the 386EX-Card III. IRQs 1, 5, 7, 9, 13 and 14 are free for applications. If no RTC interrupt is needed, IRQ8 can also be used for other purposes (RTC on signal, RTC open-drain output). If the first or second serial interface are not needed or can be operated without interrupts, then IRQ4 and/or IRQ3 are also available. Note that IRQ8 is inverted on the connector, and is thus active-low.

The PIC2 output connects to the IRQ2-input of the PIC1. The IRQ2-input is therefore configured as a slave input, so that there is no IRQ2 in the literal sense. Thus, furthermore, no IRQ is assigned to the vector Int 0Ah. The CPU core has a general interrupt input, to which the output of the PIC1 is attached. There are also the NMI and the SMI interrupt inputs, but these are not used on the 386EX-Card III.

Programming details for the interrupt controllers can be taken from Intel's 386EX-processor manual or the usual PC literature. Therefore only some references are specified here.

### 5.6.2. Edge and level triggering

The interrupt controllers of a PC traditionally operate with edge triggering. A reprogramming to level triggering is not recommended, since problems will arise with the BIOS interrupt functions (especially the RTC and Timer 0). If the RTC interrupt is not needed, the PIC2 can be adjusted to level triggering. The advantage of level triggering: several units can share an IRQ by wired OR and/or wired AND functions (this does not work well with edge triggering, since edges are lost if two interrupt signals on a line occur at the same time.) The disadvantage of level triggering is the fact that the interrupt source must be reset immediately within the service routine (which is, for example, simply not possible with the timer). Otherwise further interrupts will arise.

### 5.6.3. Assigned interrupt vectors

A range of eight consecutive interrupt vectors can be assigned to each PIC by software initialization. On a PC, the vectors Int08 to Int0Fh are traditionally assigned by the BIOS to the PIC1 and the vectors Int70h to Int77h are assigned to the PIC2. According to the PC tradition, the PIC1's vectors therefore lie within the range of Int0 to Int 1Fh, designated by Intel as "reserved." In other words, they share the vector with certain processor exceptions. In practice this does not usually lead to problems.

### 5.6.4. Masking of interrupts

In order to activate an IRQ, the associated bit in the mask register of the PIC must be set to 0. For the IRQs of the PIC2, the PIC1's mask bit 2 (belonging to IRQ2) must also be set to 0. The mask registers are located at I/O addresses 21h for PIC1 and at A1h for PIC2.

### 5.6.5. Resetting the interrupt controller

Each IRQ input has an in-service bit in the interrupt controller. In principle the interrupt service routines must reset the in-service bit of the relevant IRQ, since otherwise no further IRQ with the same or lower priority can be generated. This is normally done via the "nonspecific reset instruction"

out [20], 20

and/or for the PIC2:

```
out [A0], 20
```

or in "C":

```
_outp(0x20, 0x20); _outp(0xA0, 0x20);
```

thus through output of byte 20h at I/O address 20h and/or A0h. For the IRQs of PIC2, the in-service bit of IRQ2 must also always be reset; both of the indicated "Out" commands must therefore be made.

It must be noted that upon entering an interrupt routine the CPU disables all interrupts by first resetting the Interrupt Enable flag. This applies to IRQ service routines as well as to software interrupts (only in protected mode a different setting can be selected for each interrupt). Therefore the interrupts should be re-enabled within the interrupt routine as soon as possible (also depending on the requirements of the application).

#### 5.6.6. Non-Latching of IRQs

On the 8259 IRQs are **not latched** (stored), even though the Intel manual gives this impression. If a peripheral drives its IRQ signal inactive before the CPU can service the IRQ, then this interrupt is lost. This may happen if interrupts are disabled in the CPU, or if the CPU is servicing another IRQ of higher priority at this particular moment. Only directly during an interrupt acknowledge CPU cycle will the states of the IRQ inputs be frozen, in order to generate an unequivocal interrupt vector. The Interrupt Request Register (IRR) otherwise shows only the state of the IRQ inputs. This applies independently of whether or not an IRQ is masked out. If, in the edge-triggered mode, an IRQ is just being processed (in-service bit set), the IRR's relevant bit will be read as 0, since the Edge Sense Latch disables the input. The Edge Sense Latch is reset by a low impulse on the IRQ input, even if the in-service bit is still set, so that the IRQ input via IRR can be read in again.

#### 5.6.7. Spurious interrupt

The non-latching of IRQ impulses also makes default or spurious interrupts necessary. This situation arises with "dirty" IRQ signals, e.g. with IRQs from bouncing keyboards. If the CPU executes an INTA cycle in reaction to an IRQ, but the PIC has already forgotten the associated IRQ input (since the signal was reset), the PIC must nevertheless send an interrupt vector to the data bus (a random value on the data bus could otherwise make the computer hang). This is then the "spurious IRQ7". It is even activated if the IRQ7 is masked out. The IRQ7's in-service bit is not set in the case of a spurious IRQ. A spurious IRQ15 can also occur with the PIC2. Whether an IRQ7 or an IRQ15 arises depends on the timing of the input signal. Because of the PIC2's delay the IRQ signal remains valid on the PIC1 somewhat longer, so that the PIC1 could potentially regard the IRQ as not "spurious" and activate the PIC2, which would then produce a spurious IRQ15.

#### 5.6.8. IRQ priority

On a PC, the priority of the IRQs is usually specified in such a way that IRQ0 has the highest priority, and the other IRQs follow in numerical order. Since the PIC2 is attached to IRQ2, the IRQs of the PIC2 take priority over the IRQ3. However the service routines of the PIC2 cannot be interrupted by higher priority PIC2 IRQs so long as the in-service bit of the IRQ2 is not reset. But if this bit is reset, they can also be interrupted by lower priority PIC1 IRQs.

The priorities can also be changed, however only cyclically within the individual PICs. In other words, one specifies the IRQ with the lowest priority, from which the other priorities within this PIC are automatically determined. The definition of lowest priority for the PIC1 and/or PIC2 is made via the command

```
out [20], C0+ IRQ-Nr
```

and/or

```
out [A0], C0+ IRQ-Nr
```

For example,

```
out [20], C3
```

sets IRQ3 to the lowest priority whereby the IRQ4 (of COM1) gets the highest priority.



### 5.7. DMA Controller

The 386EX processor contains a DMA controller which is mainly compatible to the standard PC 8237 controller. However, it contains an additional operating mode (two cycle mode), but only two channels.

By using the DMA, very short reaction times and servicing times are possible compared to interrupt operation in case a peripheral needs data or offers data.

Devices which are capable to make use of the DMA are the synchronous and asynchronous ports as well as external devices on the PIF-Bus.

The signals DRQ0 and DRQ1 which are necessary to initialize a DMA cycle by an external device are available on connector X3. They are multiplexed with DCD1 and RXD1 of COM2. If an internal device like an asynchronous port uses DMA, the DRQ signal is connected within the CPU chip, thus the COM2 signals are not affected.

### 5.8. Asynchronous Serial Interfaces

Two UARTs compatible to the well-known 16C450 are integrated into the 386EX processor. In contrast to the UARTs that are integrated these days into PC main boards (which are compatible to the 16C550) they have no FIFOs.

The first serial interface (COM1) is used as the 386EX-Card III's standard input/output port (DOS "con" device). For "con," COM2 or an external serial interface can also be employed (COM1 through COM4 are possible).

#### 5.8.1. Signals of the serial interfaces

Both serial interfaces have the eight usual PC signals: data lines (RXD, TXD), modem status inputs (DSR, CTS, DCD and RI) and modem control outputs (RTS, DTR). Frequently one of the pairs DTR/DSR or RTS/CTS is used for handshake operation.

The eight COM1 signals can be reconfigured individually as input or output ports (see the chapter, "I/O Ports").

In addition, the COM2 signals RTS, DTR, DSR and RI can be used alternatively as signals of the synchronous serial interface (see relevant chapter).

#### 5.8.2. BIOS functions

The BIOS offers the usual PC INT 14h functions for operation of the serial interface. Deviating from the PC tradition, these are operated with receive interrupts in the case of the 386EX-Card III. This setting can be deactivated in the BIOS Setup. The buffer size specified in the Setup is effective only in interrupt mode. In order to reduce computing time, many applications program the serial interfaces directly by accessing the UART registers. In such a case, at least the receive interrupt is usually used.

#### 5.8.3. Hardware interrupt of the serial interfaces

As on a PC, COM1 and COM2 use IRQ4 and IRQ3. In the event that the interrupts are not needed for the serial interfaces, IRQ4 and IRQ3 can be used externally for other purposes.

There are four different interrupt sources for each UART, which however all use the same IRQ line.

- Line-status interrupt: overrun, parity or framing errors, or break ;
- Receive interrupt: a character was completely received (receive buffer full);
- Transmit interrupt: a character was completely sent (transmit buffer empty);
- Modem-status interrupt: the status of DCD, RI, CTS or DSR has changed\*.

Definitions:

Overrun Error: The Receive Buffer register was overwritten by a further character. This means that the previous character was not retrieved by the processor in time;

Parity Error: The parity or the parity bit (with forced parity) of the received character was unequal to the complement of the Even Parity Select (EPS) bit in the line control register. This happens only with a switched-on parity bit. With "forced parities" the parity bit can be used in a way similar to a ninth

data bit, since one can set it by means of the EPS bit when sending, and interpret it by means of the line-status interrupt when receiving.

Framing Error: A character did not have a stop bit (or had a stop bit too few, if 1.5 or 2 stop bits are set). For a valid stop bit the RXD line must remain in the high state for the duration of one bit.

Break condition: The RXD line went on "low" for the duration of more than one character. This also always results in a framing error. A break condition can be generated when sending by the setting of the line control register's break bit. The minimum time duration of a character can be achieved by sending a character and waiting afterward until the Transmit Shift register is empty. Afterwards the break bit is again reset. One can signal a special condition to the receiver in this way, without having to fall back on certain byte values or byte sequences.

\* with RI: only rising edges must generate an IRQ.

#### 5.8.4. UART register

Divisor Latch low (DLL, Address 0)

Divisor Latch high (DLH, Address 1)

Interrupt Enable Register (IER, Address 1):

- Bit 0: Receive Interrupt
- Bit 1: Transmit Interrupt
- Bit 2: Line Status Interrupt
- Bit 3: Modem Status Interrupt
- Bit 4..7: 0

Line Control Register (LCR, Address3):

- Bit 0: Word Length Bit 0
- Bit 1: Word Length Bit 1
- Bit 2: No. of Stop Bits (1 or 2)
- Bit 3: Enable Parity Bit
- Bit 4: Select Even Parity
- Bit 5: Select Forced Parity
- Bit 6: Set Break
- Bit 7: Divisor Latch Enable

Interrupt Identification (Status) Register (IIR or ISR, Address 2):

- Bit 0: 0 = Interrupt Pending
- Bit 1..2: 0 = Modem Status Interrupt
  - 1 = Transmit Interrupt
  - 2 = Receive Interrupt
  - 3 = Line Status Interrupt
- Bit 3..7: 0

Modem Control Register (MCR, Address 4):

- Bit 0: /DTR
- Bit 1: /RTS
- Bit 2: OUT1: Test Bit for /RI in Loop-Back Mode
- Bit 3: OUT2: Test Bit for /DCD in Loop-Back Mode; activates the UART interrupts\*
- Bit 4: Set Loop-Back Mode
- Bit 5..7: 0

Line Status Register (LSR, Address 5):

- Bit 0: Received Data Ready
- Bit 1: Overrun Error
- Bit 2: Parity Error
- Bit 3: Framing Error
- Bit 4: Break Condition
- Bit 5: Transmitter Hold Register Empty
- Bit 6: Transmitter Shift Register Empty
- Bit 7: 0

Modem Status Register (MSR, Address 6):

- Bit 0: Delta CTS
- Bit 1: Delta DSR
- Bit 2: Delta RI
- Bit 3: Delta DCD
- Bit 4: /CTS

Bit 5: /DSR

Bit 6: /RI

Bit 7: /DCD

Scratch Register (SCR, Address 7)

\*OUT1 and OUT2 are originally universal digital outputs of the UARTs 8250 and 16C450. On a PC, the UART interrupt output is traditionally connected to the interrupt controller by means of OUT2 through a tri-state buffer, or it is separated (deactivated). Certain UARTs already have this gate internally, such as the Exar/Startech ST16C552. On the 386EX, a multiplexer is controlled by OUT2, which can switch between the UART's IRQ output and an external signal (pin).

### 5.9. Synchronous Serial Interface

The 386EX-Prozessor has a synchronous serial interface (SSIO) in addition to the two asynchronous ones. There is a data line and a clock line for sending and another pair for receiving. These four signals are located on the X1 connector on the same pins as the COM2 signals DTR, DSR, RI and RTS.

The SSIO can be operated at a maximum of half the processor clock speed (CLK2/4), for example at most 12.5 Mbaud for the 386EX-Card III with a 25 MHz CPU. 16-bit words are transmitted.

The transmitter and receiver can both operate in either master or slave mode. The IRQ9 interrupt is optionally produced for the "Transmit Buffer Empty" and "Receive Buffer Full" states.

When using the synchronous serial interface one must note these two known bugs, documented by Intel, which they have never fixed:

- Auto-Transmit Mode. This would actually be the normal master transmit mode. However it is correctly usable only at the maximum Baud rate, since the first bit of a data word is output at the maximum rate regardless of the Baud rate setting.
- The status register's Transmit Buffer Empty bit does not return a correct value. Before turning off the transmitter, one must poll the Baud-rate counter and wait until the first bit is completely sent.

### 5.10. Ethernet

The 386EX-Card II contains the 10 MBit Ethernet chip CS8900A by Cirrus. The signals for Twisted Pair are available on a 4 pin header (X8).

#### 5.10.1. Initialization

The CS8900A is used in a configuration without EEPROM. Its configuration data must be provided for by the driver program. After reset, the Ethernet chip is in a power down mode. It can be awakened by the small program INIT.COM.

#### 5.10.2. Packet Driver

The packet driver which comes with the 386EX-Card (EPKTISA.COM) demands several initialization parameters (see online help of the packet driver). The packet driver is the basic hardware dependent driver which underlies several higher level protocol stacks.

Command line:

```
epktisa [options] <packet_int_no> <I/O address> <IRQ> <MAC address>
```

Options:

- i -- Force driver to report itself as IEEE 802.3 instead of Ethernet II.
- d -- Delayed initialization. Used for diskless booting
- n -- NetWare conversion. Converts 802.3 packets into 8137 packets
- w -- Windows hack, obsoleted by winpkt
- p -- Promiscuous mode disable
- u -- Uninstall
- s -- Include a scan of I/O space even if a plug and play card found
- q -- Quiet installation (suppress messages)

packet\_int\_no: a number between 0x60 and 0x67 used for the software interrupt of the packet driver (its interface to the higher level protocol driver).

I/O address: must be 0x340 on the 386EX-Card III.

IRQ: can be one of the numbers 9, 13, or 14. Take care that IRQ14 ist not used if a compact flash card is used.

The individual address of the Ethernet chip (MAC address) must also be included on the command line of the packet driver.

#### 5.10.3. MAC Address

Please take care that the MAC address ist unique within the local network. Worldwide unique MAC addresses are administered by the IEEE. The factory configuration of the 386EX-Card contains such an individual unique MAC address within the STARTETH.BAT file on the flash disk.

#### 5.10.4. TCP/IP Drivers

Several TCP/IP protocol stacks are available for DOS PCs. We recommend to use Datalight Sockets™. It is, however, not royalty free and is therefore not included in the standard version of the 386EX-Card.

It contains a TCP/IP driver with a defined API (application programming interface). The underlying hardware driver can be a packet driver, NDIS or ODI driver.

Datalight Sockets contains:

Servers:

HTTPD:	Web Server including SSI, CGI, Remote Console;
FTPD :	FTP server
HTTPFTPD	combined FTP/HTTP server

Clients:

GETMAIL  
MAKEMAIL

SENDMAIL  
 HTTPGET  
 FTP  
 LPR  
 NETBIOS  
 SLIP/PPP

Libraries:

CAPI                    Standard TCP/IP Library  
 FTPAPI  
 PPP/SLIP

## 5.11. I/O Ports

The 386EX-Card III has a maximum of 32 freely programmable digital I/O ports on one connector. For the most part these can be configured independently of each other as input or output. Some of these pins are also used by the timer, the interrupt controller and the first serial interface (see BIOS I/O Setup).

Seventeen (17) of the I/O ports belong to the processor's internal port registers. The PIF bus's data, address and control signals constitute an additional 15.

### 5.11.1. Processor ports

These ports are addressed as part of the 386EX's port registers P1, P2 and P3. The direction (input or output) is specified in the BIOS I/O Setup or by means of the port's direction register (0 = output, 1 = input or open-drain output). If the inputs are to be used, the respective bits of the output port must be set to 1 (because of the open drain outputs).

	Configuration	Pin State	Output	Direction
P1	F820h	F860h	F862h	F864h
P2	F822h	F868h	F86Ah	F86Ch
P3	F824h	F870h	F872h	F874h

Itemized below are the bits of these registers that are accessible on the connector (see also the table in chapter 10):

Port/Bit	Alternative Funktionen
P1.0	COM1 DCD
P1.1	COM1 RTS
P1.2	COM1 DTR
P1.3	COM1 DSR
P1.4	COM1 RI
P2.5	COM1 RXD
P2.6	COM1 TXD
P2.7	COM1 CTS
P3.0	IRQ4 or Timer 0 output (TOUT0)
P3.1	IRQ3 or Timer 1 output (TOUT1)
P3.3	IRQ5
P3.3	IRQ6
P3.5	IRQ7

The remaining bits of the registers for ports P1, P2 and P3 should not be modified by application programs, since they are used within the 386EX-Card III.

## 5.12. I2C Bus

The BIOS provides some functions for accessing the I2C bus (see BIOS Reference).

### 5.13. PIF Bus

#### 5.13.1. Overview

The PIF bus is simple 8-bit extension bus for connecting peripheral cards to the 386EX-Card III. The bus architecture is derived from the interfaces of various LCDs (although their plug allocations are not uniform). Thus LCDs with the Toshiba T6963C controller can even be operated directly on the PIF bus.

The address space consists of 64 I/O addresses. However, it is not 6 address lines that are used, but 4 chip-select lines and 4 address lines. Of the chip-select lines, only one is active at a time (1-out-of-4 code). Thus 16 I/O addresses are assigned to each chip select. This principle simplifies address decoding. If not more than four devices should be connected to the bus, address decoding is unnecessary (provided that not more than 16 addresses are required by any device).

Examples for common chips which can be directly operated on the PIF-Bus are the PIO 82C55 and the LCD controller T6963C.

Substantial are the active-low read (/RD) and write lines (/WR), of which exactly one is active for each PIF bus access, according to whether it is a read or a write cycle. The data lines are sampled in each case on the **rising** edge, thus toward the end of the bus cycle.

#### 5.13.2. Hardware design for the PIF bus

The following points must be noted when designing hardware to connect to the PIF bus:

1. Access to the PIF peripherals is through I/O commands. Memory-mapped accesses are not possible.
2. The four address lines of the PIF bus correspond to the lowest four address lines of the CPU bus. They can therefore accept any offset value from 0 to 0Fh.
3. Exactly one chip-select line is active (low) during a valid PIF bus access.
4. The four chip-select lines are decoded from address lines A4 and A5 of the CPU bus. Therefore they correspond to offset values of 0h, 10h, 20h and 30h.
5. The base address of the PIF bus is added to the offset values. For the 386EX-Card III it is 300h. Other CPU cards may vary.
6. Exactly one of the signals /RD or /WR is active (low) during a valid PIF bus access. The peripheral must evaluate these signals and the chip-select signals - otherwise incorrect bus cycles can occur.
7. The data lines are sampled during both the reading and writing on the rising edge of the /RD or /WR signals.
8. The duration of a PIF bus cycle can be set to 1µs, 560ns, 360ns, or 170ns (for a 66 MHz CPU clock-speed) in the BIOS setup. A change of the CPU clock-speed causes a corresponding change of these values.
9. Ready signal: This signal is generated by the peripheral hardware in order to extend PIF bus cycles. Addresses, chip selects and /RD or /WR remain valid until the peripheral releases the Ready signal again (switches to high). The signal has a pull-up resistor on the CPU card. The peripherals must use open collector (open drain) outputs if more than one peripheral is designed to use the Ready signal.

#### 5.13.3. PIF bus Mechanics

The PIF bus signals for the 386EX-Card III are located on a 26-pin, double-row header with 2.54mm spacing. The pinout of the first 26 pins is compatible with the 26-pin connectors used by various *taskit* CPU cards. Thus the usual flat ribbon cables can be used. When using flat ribbon cables the cable length should not exceed 30 cm, in order to minimize disturbances by crosstalk and line reflections.


Lengths of up to approximately 1.5m are possible if additional GND lines are used. /RD and /WR signals in particular should be shielded from each other (and from other signals) by GND lines. These GND lines should be connected at both cable ends. The CPU card must be located on one end of the cable. Output termination resistors of 39 ohms to /RD and /WR are recommended.

Various available PIF cards are equipped with a header/socket combination, which makes it possible to stack several cards.

### 5.13.4. PIF bus signals

Signal	Pin No. X2 Starter-Kit Board	I/O	active	Description
D0 ... D7	11 ... 18	I/O	high	Data lines
/CS0 ... /CS3	7, 22, 23, 24	O	low	Chip select. For each PIF-bus cycle exactly one chip select is active.
A0 ... A3	8, 9, 20, 21	O	high	Address lines
/RD	6	O	low	Read Signal. Is active for each read access.
/WR	5	O	low	Write Signal. Is active for each write access.
/RESET	10	O	low	Reset Signal. This is the output signal of the 386EX-Card III reset generator.
/INT	25	I	low	Interrupt Request. On the 386EX-Card III this signal is inverted and connected to IRQ1. It has a 10kOhm pull-up resistor.
READY	19	I	high	Permits peripherals to extend PIF bus cycles (low = not ready). The bus cycle is terminated by the CPU once the ready signal is high again.
VCC	3			5V supply voltage
VEE	4			Negative supply voltage for the contrast current used by certain LCDs (not used by the 386EX-Card III)
GND	1, 2, 26			Ground (negative connection for the supply voltage)


## 5.13.5. PIF bus timing (Write)

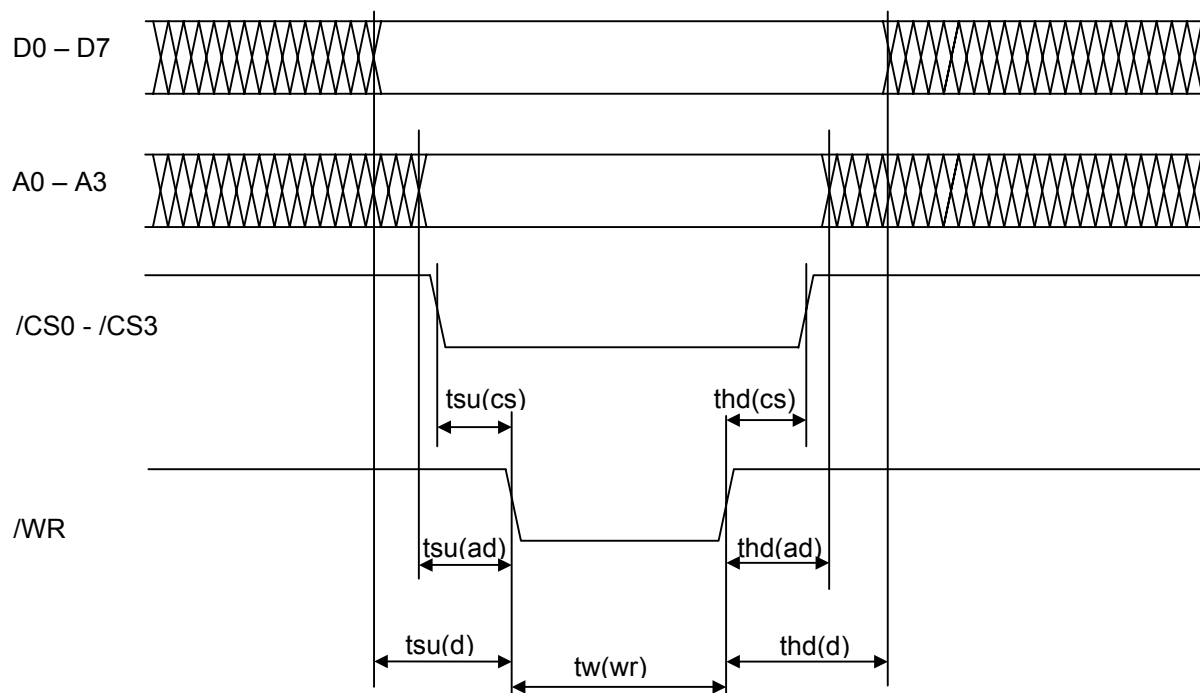

Symbol	Name	Description	min.	typical	max.
$tsu(cs)$	Chip Select setup time	/CSn low to /WR low	70 ns		
$thd(cs)$	Chip Select hold time	/WR high to /CSn high	20 ns		
$tsu(ad)$	Address setup time	A0..A3 valid to /WR low	70 ns		
$thd(ad)$	Address hold time	A0..A3 valid after /WR high	20 ns		
$tsu(d)$	Data setup time	D0..D7 valid to /WR low	70 ns		
$thd(d)$	Data hold time	D0..D7 valid after /WR high	30 ns		
$tw1(wr)$	Write pulse width	/WR low to /WR high (normal mode)	850 ns		
$tw2(wr)$	Write pulse width	/WR low to /WR high (fast mode)	45 ns		



## 5.13.6. PIF bus timing (Read)

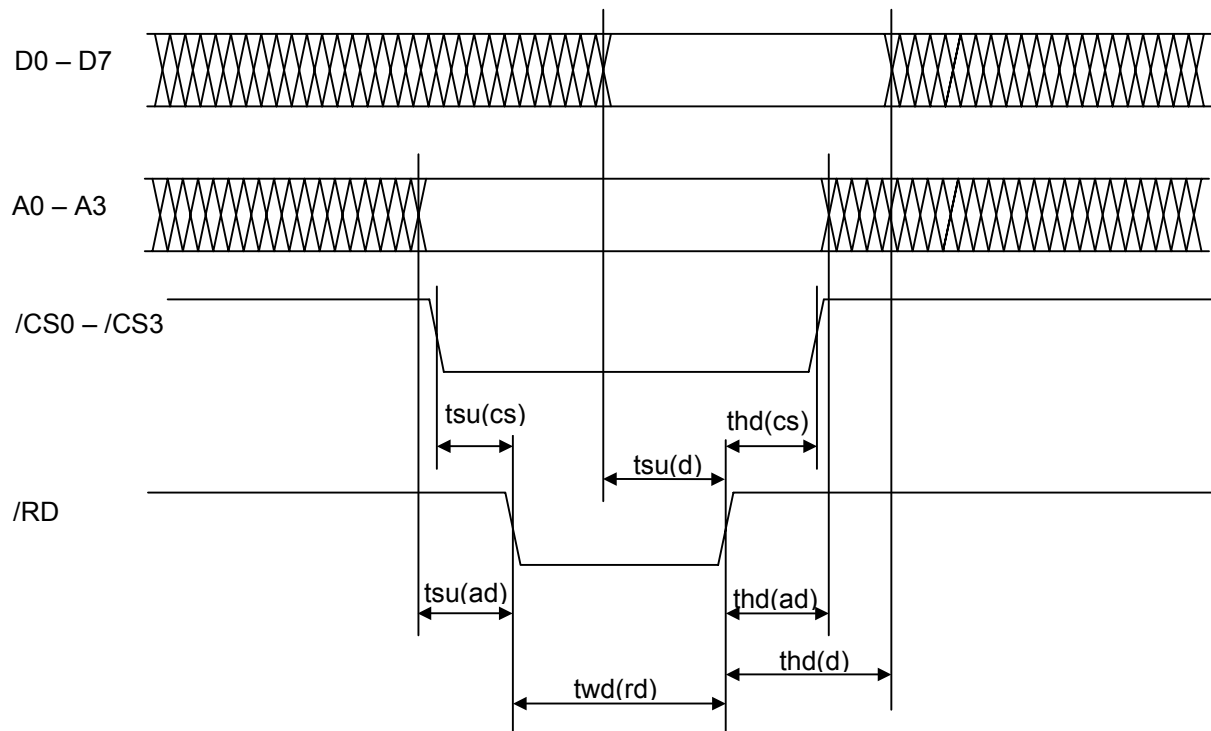

Symbol	Name	Description	min.	typical	max.
$tsu(cs)$	Chip Select setup time	/CSn low to /RD low (Chip Select valid to Read valid)	70 ns	3 CLK cycles	
$thd(cs)$	Chip Select hold time	/RD high to -CS high (Chip Select hold after Read invalid)	20 ns	1 CLK cycle	
$tsu(ad)$	Address setup time	A0..A3 valid to /RD low	70 ns	3 CLK cycles	
$thd(ad)$	Address hold time	A0..A3 valid after /RD high (address hold after Read invalid)	20 ns	1 CLK cycle	
$tsu(d)$	Data setup time	D0..D7 valid to /RD high (Data valid to Read invalid)	10 ns		
$thd(d)$	Data hold time	D0..D7 valid after /RD high (data hold after Read invalid)	0 ns		
$tw1(rd)$	Read pulse width	Normal Mode	850 ns	28 CLK cycles	
$tw2(rd)$	Read pulse width	Fast Mode	60 ns	2 CLK cycles	
$tdly(d)$	Data delay time	READY valid to data valid delay			20ns
$tdly(rd)$	Read delay time	READY valid to Read invalid delay	1 CLK cycle		2 CLK cycle
$tclk$	Clock cycle	Clock cycle length at CLK2 = 66 MHz		30 ns	

### 5.14. CompactFlash

CompactFlash (CF) cards are common, internationally standardized memory modules. They are used in digital cameras and other products. CompactFlash cards are addressed by the BIOS as hard drives. They can be read and written by the PC through PCMCIA slots (PC-card slots) with a PCMCIA adapter. The media can currently (March 2005) hold a maximum of 2GB. There are also CompactFlash-compatible 1-inch hard drives from IBM and Hitachi with up to 4GB (Microdrive™).

The 386EX-Card III BIOS supports up to two CompactFlash cards attached to the PIF bus.

CompactFlash cards are registered in the BIOS setup as hard drives. Usually, LBA or CHS mode is used (but beware: if the CF module is to be used in a PC-card slot, it must be formatted compatibly to the respective PC. In some cases the factory format has to be eliminated by deleting all partition data). The CF card is assigned DOS drive letter D:. By selecting the "Swap Hdd0 and Hdd1" option in the setup, it is possible to assign "C:" to the CF module, so that the 386EX-Card III can boot from it. The DOS programs FDISK and FORMAT can be used for partitioning and formatting.

A schematic for a CompactFlash adapter for the PIF bus is given in the appendix.

### 5.15. Power Management

Power consumption can be drastically reduced in many cases by the power management functions of the BIOS. This applies whenever the full CPU performance at 25 MHz is not needed permanently.

#### 5.15.1. Changing the CPU clock rate

The CPU clock speed can be lowered by BIOS functions down to 1.8432 MHz. The BIOS adjusts the divisor values for Timer 0.

Note that switching the clock rate does not happen instantly. To switch from the lowest to the maximum clock rate the clock generator needs about 4ms. The accuracy of Timer 0 is thereby affected too. Its divisor values (prescalers and timer registers) are re-loaded immediately by the BIOS function. Also, the current timer count is not taken into account by the BIOS function.

#### 5.15.2. Idle mode

An application program can always switch, when no activity is taking place, into the idle or power-down mode. Only upon the appearance of an interrupt will the CPU resume execution of the program.

In idle mode only the clock for the CPU core is internally turned off, while the clock for the serial interfaces and the timers keeps running.

The normal operating condition is restored by each hardware interrupt that is not masked out (see also the chapter concerning interrupt controllers). Note that Timer 0 normally generates an IRQ every 55ms and thus automatically terminates the idle mode. The application program must ensure that the idle mode is restored as required after each IRQ.

The BIOS function for idle mode accounts for the simultaneous down-clocking of the processor. In idle mode the clock rate is given to the function as a parameter. Here again one must consider switching time (see above).

#### 5.15.3. Power-down mode

The clock for the CPU core and internal peripherals of the 386EX is stopped. The timers continue to run only if they are operated with an external clock. The SSIO functions only in slave mode. Since the UARTs possess their own clock, they also function in power-down mode (though not in deep power-down mode).

As with idle mode, the BIOS function for the power-down mode accounts for the simultaneous down-clocking of the processor. The clock rate is given to the function as a parameter. Yet again, the switching time must be considered (see above). Deep power-down mode has its own BIOS function.

Restarting from power-down mode is done by an interrupt from the RTC, the serial interfaces, or the timer, or via external IRQs. These IRQs may not be masked out. Interrupts from the timers can terminate the power-down mode only if they are operated with an external clock (Timers 0 and 1) and/or with COMCLK (Timer 2), since the normal clock pulse for the timers (PSCLK) is turned off in power-down mode.

### 5.15.4. Deep power-down mode

In deep power-down mode the oscillator chip is turned off. The power input is thereby reduced to less than 1 mA.

The time necessary for restarting the clock to 25 MHz amounts to 9ms.

Return from deep power-down mode can take place only via an IRQ8. This is normally the IRQ of the RTC. The signal  $\text{--IRQ8/TCLK0}$  on the 386EX-Card III connector is used by the open drain output of the RTC. External open drain signal sources can be attached here and likewise produce an IRQ8.

## 6. PC Programs

### 6.1. VTERM32

VTERM32.EXE is the standard Windows™ terminal program for the 386EX-Card III and thus the most appropriate connection program for the 386EX-Card III during software development. It supports Remote Drive Mapping and thereby allows for easy file transfers to and from the host PC.

#### 6.1.1. File transfer with VTERM

Apart from file transmission via RDRIVE, which runs automatically, VTERM32 must be instructed explicitly to start other kinds of file transfers. This particularly affects file transfers by the BIOS Setup (flash update/backup) and communication with XSEND and XLOAD. Sending or receiving a file in VTERM is started with the appropriate "send" or "receive" command of the "file" menu. VTERM32 then asks for a transmission protocol and a file name.

Transmission to the 386EX-Card III generally takes place via Xmodem protocol, therefore VTERM32 must also be set to Xmodem. Then one enters the name of the file to be sent, or the name of the file which should be received (Xmodem does not transfer the file name).

### 6.2. VTERM for DOS

VTERM.EXE is a DOS terminal program for the 386EX-Card III. It supports Remote Drive Mapping and thereby allows for easy file transfers to and from the host PC.

#### 6.2.1. Command-line parameters

VTERM can be called with the following command-line parameters:

- ? : Command-line parameter overview
- b(baud): Set data transmission rate
- c(1-4) : Select serial port
- m : Select black/white display
- o : Open log file
- t(AHT) : Select terminal emulation

#### 6.2.2. VTERM commands

The following keys are assigned commands:

- ALT-B : Set data transmission rate
- ALT-C : Select serial port
- ALT-D : Assign remote drives
- ALT-E : Turn local ECHO on/off
- ALT-F : Set handshake
- ALT-H : Help
- ALT-O : Open/close log file
- ALT-P : Set data transmission parameter
- ALT-R : Receive file
- ALT-S : Send file
- ALT-T : Set terminal emulation
- ALT-W : Save settings
- ALT-X : Exit VTERM
- ALT-Y : Clear screen
- ALT-Z : DOS command

In addition to the usual terminal functions (output to the screen, input through the host PC's keyboard, and file transfer) VTERM permits direct access from the 386EX-Card III to the PC's drives with the help of the TSR program RDRIVE.

### 6.2.3. File transfer with VTERM

Apart from file transmission via RDRIVE, which runs automatically, VTERM must be instructed explicitly to start other kinds of file transfers. This particularly affects file transfers by the BIOS Setup (flash update/backup) and communication with XSEND and XLOAD. Sending or receiving a file in VTERM is started with ALT-R or ALT-S, respectively. VTERM then asks for a transmission protocol and a file name.

Transmission to the 386EX-Card III generally takes place via Xmodem protocol, therefore VTERM must also be set to Xmodem. Then one enters the name of the file to be sent, or the name of the file which should be received (Xmodem does not transfer the file name).

### 6.3. FLASHHDD

Flashhdd.exe is used to create a flash image file based on the contents of any directory. This file is then transferred via BIOS setup. Its contents constitute drive C: of the 386EX-Card III. In order to be able to boot DOS, the affected directory must contain at least the file command.com.

Call:

**FLASHHDD [/B<n>] [/S<m>] [/V] [/?] <Source Directory> [<Destination File>]**

Options:

/B<n> n = Number of blocks (default 14).  
 /S<m> m = Block size in kB (64 in the case of the 386EX-Card III).  
 /V Verbose (Show files and directories)  
 /? Help  
 /M MS-DOS compatible Flash-disk format (include MS-DOS system files)

The maximum value for n depends on the configuration, in accordance with the following table:

Total capacity	n
1 MB	14
2 MB	29
4 MB	61
8 MB	125

Exceeding the maximum value for n should be avoided, since DOS computes the capacity from the boot sector of the Flash disk. If DOS computes more capacity than is physically present, a BIOS error will occur when DOS attempts to access non-existing sectors, leading to a system hang-up.

Make sure that the target file is not inadvertently in the source directory (to avoid an error by recursion).

### 6.4. ROMDRV

Romdrv.exe permits the creation of a ROM disk image file based on the contents of any directory. This file is assigned drive A: in the 386EX-Card III's Flash memory as per BIOS Setup.

Call:

**romdrv <Source Directory> [<Destination File>]**

Make sure that the target file is not inadvertently in the source directory (to avoid recursion errors).

### 6.5. Bin2hex

Bin2hex is a program for generating a Intel Hex86 file from a binary file (e.g. ".COM" file).

### 6.6. Hex2bin

Hex2bin generates a binary file from an Intel Hex86 file.

## 7. 386EX-Card III Programs

### 7.1. Mapping Remote Drives with RDRIVE, RMAP and RMCWD

RDRIVE enables integration of the PC drives as drives of the 386EX-Card III. The program is made resident after loading. Files can be transferred to and from the host PC like over a network, e.g. by the "copy" command. This is the 386EX-Card III's standard technique for transmitting files. In addition, programs can be loaded directly from the host PC, without first copying them to a local 386EX-Card III drive.

Call:

```
rdrive [-?] [-c<n>] [-u]
```

```
-?           : Help  
-c<1..4>    : select COM port 1 to 4 (default: COM1)  
-u          : remove RDRIVE from RAM
```

To change the serial interface with -c, RDRIVE must be cleared beforehand with -u.

With the program RMAP, drives and directories of the host PC can be mapped as drives of the 386EX-Card III. LOCAL designates the drive letter of the 386EX-Card III to be used, and REMOTE designates the drive or directory of the host PC to be used.

```
RMAP /LOCAL=D /REMOTE=C
```

makes, for example, drive C: of the host PC available as drive D: of the 386EX-Card III. There is no firm rule about which letter must be used in which order -- independently of whether the remote drives are local or network drives of the host PC.

Mapping directories is just as easy:

```
RMAP /LOCAL=E /REMOTE=C:\Programs\Files386
```

The assignments can be overwritten at any time, or can be deleted by indicating the local drive letter:

```
RMAP /LOCAL=D
```

The command RMAP alone generates a list of current drive assignments.

The program RMCWD.EXE automatically assigns the indicated drive letter to the directory from which Vterm was started.

### 7.2. XLOAD

Xload is a simple program for transferring files from the host to the RAM or Flash disk. The transmission protocol XMODEM is used. After the call of:

```
xload [com port ] file
```

Xload waits until the transfer is started on the host side.

### 7.3. XSEND

Xsend is a simple program for transferring files from the 386EX-Card III to the host. The transmission protocol XMODEM is used. After the call of:

```
xsend [com port ] file
```

the transfer must be started from the host side.

### 7.4. ZTRANS

Ztrans offers extended functionality in relation to Xsend and Xload, in particular the transmission of the file name as well as the transmission of several files with one command. The underlying protocol is ZMODEM. This is not supported by VTERM. A ZMODEM-capable terminal program (e.g. Windows HyperTerminal) must be used instead, or Ztrans must also be started on the host.

Call:

***ztrans*** [/R] [/Bn] [/Cn] [/?] <File(s)>

Options

/R	Receive instead of send
/Bn	Set baud rate
/Cn	Select interface
/?	Help

Wildcards are possible for < File(s)>.

## 8. BIOS Setup

The 386EX-Card III offers a variety of settings for adapting it to the needs of the application. In order to enter setup, the <S> key must be pressed during the memory test. The memory test is then interrupted and the setup menu appears. A menu item can be selected here with the cursor keys, or with the TAB or Ctrl-E keys.

### 8.1. Main Setup

**Date and Time:** Setting the real-time clock (RTC). These values are stored after power-down only if a lithium battery is installed or another power supply is attached to the I/O connectors Vbatt pin.

**Console Port:** A serial interface to be addressed by the BIOS or ROM-DOS ("CON" device) is registered here. **Note:** if "none" or a nonexistent interface is set, then the setup and DOS prompt cannot be accessed after the next system start. This sometimes does make sense, in order to prevent unauthorized access to the 386EX-Card III. Resetting the Console Port is however still possible by short-circuiting the ready pin during startup to GND (ground). The BIOS then automatically sets default values for the first serial interface and jumps to the setup menu.

**Real Mode Flash:** Here one sets how much CPU address space in the lowest megabyte is to be made available to the Flash memory. This memory range is then accessible in the 386EX CPU's Real Mode. Possible settings: 128KB (default), 256KB or 512KB. The associated address range is located at the end of the lowest megabyte. 128kB are used here by the operating system (BIOS and ROM-DOS).

**Enable ROM Disk:** The Flash memory range set here can be used for a non-writeable ROM disk or also as user addressable flash memory.

**Enable RAM Disk:** The RAM disk uses the free RAM range above 1MB, to the extent that it is not already made available below 1MB. With 1MB of RAM, at least 128KB are available for the RAM disk (according to the default size of the Real Mode Flash). This range can be increased by setting more Real Mode Flash.

**CompactFlash 1 and 2:** Up to two CompactFlash™ memory cards or Microdrive™ hard drives can be attached to the 386EX-Card III. These can be operated in LBA mode or in auto-CHS mode. The mode set when formatting a CompactFlash card must always be used later, including when the CompactFlash card is inserted in other computers. Changing the mode requires reformatting the card.

**CPU Clock (CLK2) in MHz:** Available clock speeds are 50, 40, 16 and 8 MHz.

### 8.2. Advanced Setup

**Power-on messages:** When "disabled," the copyright message, RAM test messages, and the BIOS configuration box are suppressed.

**System Configuration Box:** Display of the BIOS Config box can be suppressed.

**Display "Hit <S>..." :** Display of the message "Hit <S> ..." can be suppressed.

**Wait For Key on Error :** The BIOS waits for a command if any error is detected during the system test at boot time. The BIOS setup can then be started to fix any inconsistency of setup settings.

**Fast Boot:** The BIOS conducts only a shortened RAM test (saves booting time).

**ROM-DOS :** activates or deactivates the ROM-DOS.

**ROM-DOS Bootdrive :** Determines the drive from which the ROM-DOS reads the command.com, config.sys and autoexec.bat files.

**Flash File System :** turns off the BIOS's Flash File System for the on-board Flash disk.

**DOS/Non-DOS Flashdisk:** "FAT monitoring" by the BIOS achieves a substantial speed increase for the on-board Flash disk's Flash File System. This however functions only under DOS. The FAT monitoring must be turned off when using another operating system.

**SRAM and Flash Waitstates:** the default value should not be changed usually. However, if the maximum CPU clock is not used, then another value can be given. This is calculated as follows:



$n \geq 0$   
and  $n \geq (t_R + 10\text{ns}) * f_{\text{CPU}} - 1,5$

where:  $t_R$  = RAM / Flash access time (as per data sheet),  
 $n$  = number of wait states  
 $f_{\text{CPU}}$  = oscillator frequency / 2 ( $\leq 25$  MHz)

For  $t_R = 55$  ns and  $f_{\text{CPU}} = 25$  MHz the following applies:

$$(t_R + 10\text{ns}) * f_{\text{CPU}} - 1,5 = 0,125$$

The next-larger integral value for  $n = 0.125$  is 1. The 55ns RAM thus functions with 1 wait state.

For  $t_R = 70$  ns and  $f_{\text{CPU}} = 25$  MHz the formula reads:

$$(t_R + 10\text{ns}) * f_{\text{CPU}} - 1,5 = 0,5$$

One wait state must therefore also be set for 70ns RAM.

For  $t_R = 120$  ns and  $f_{\text{CPU}} = 25$  MHz:

$$(t_R + 10\text{ns}) * f_{\text{CPU}} - 1,5 = 1,75$$

Two wait states must thus be set for 120 ns Flash.

For  $t_R = 90$  ns and  $f_{\text{CPU}} = 25$  MHz:

$$(t_R + 10\text{ns}) * f_{\text{CPU}} - 1,5 = 1,0$$

One wait state must thus be set for 90 ns Flash.

### 8.3. I/O Configuration Setup

#### Setting the serial interface:

**Note:** Changing the configuration settings for the serial interfaces can completely block access to the 386EX-Card III (either intentionally or inadvertently). One should therefore know exactly which settings one changes for which purposes.

The BIOS and DOS support a maximum of four serial interfaces. These can be addressed by the user program through the BIOS via Int 14h or through DOS as devices COM1 to COM4. Additional serial interfaces are not supported by the BIOS and DOS; these must be programmed by direct access to the hardware.

**COM PORTS:** The respective UART type for each of the four possible COM ports is set with TYPE. BASE indicates the base address of the UARTs. The baud rate of the interface is set with BAUDRATE. The number of the data bits, parity and number of the stop bits are set with SETTING. Under INTERRUPTS one can indicate whether the interface should function in polling mode or with receipt interrupt. In this case, the correct interrupt line must be set. If one uses the interrupt mode, the size of the receive buffer used by the BIOS interrupt handler can be indicated in bytes with BUFFER.

**PRINTER PORTS:** The base address of the optional printer interfaces is set here.

**X1 Connector Configuration:** Definition of the function of individual I/O plug X1 pins. These can be configured as digital I/O (input, open drain output, or output), as timer functions, or as interrupts.

**PORT INIT :** It is possible here to implement circuit-dependent initializations of I/O ports (thus also of peripherals attached to the PIF bus.) very early in the boot process. One can indicate start-up values for a maximum of four I/O addresses. These I/O accesses are executed a few microseconds after a reset.

### 8.4. Flash Setup

#### Flash Update Setup

In the Flash Update Setup different ranges of the 386EX-Card III's Flash memory can be reprogrammed. Existing content is deleted and reprogrammed with data loaded via the serial interface. Loading of new data takes place with the transmission protocol XMODEM. After selection of a menu option, the card begins to send a protocol character (§). After that, transmission with XMODEM must be started from the terminal program (in the case of VTERM: Alt-S, XMODEM, file

name). After a successful download, depending upon selected range, the card is re-booted or returns to the setup menu.

### **Flash Backup Setup**

Individual ranges of the Flash can be sent to the PC. After selecting a menu option, the "receive file" function of the terminal program must be started using XMODEM protocol (in the case of VTERM: ALT-R, XMODEM, file name).

### **Flash Erase Setup**

Individual ranges of the 386EX-Card III Flash can be erased selectively. The erasure takes place in a block by block fashion (a flash block sector includes 64kB). Erasing a block normally lasts less than a second.

## **8.5. Exit Setup**

**Exit and Save changes:** End setup and save changes.

**Exit and discard changes:** End setup without saving changes.

**Reset to previous values:** All changes made since the start of the BIOS Setup are discarded.

**Reset to default values:** All BIOS Setup settings are changed to the standard values.

## 9. BIOS - Reference

### 9.1. INT 10h - Video Service

#### 9.1.1. INT 10h Function 00h - Set video mode

**Call:** AH = 00h  
AL = Video Mode

**Return:** none

**Description:** Since the 386EX-Card III does not have video hardware, this function serves only to clear the screen of the terminal PC.

#### 9.1.2. INT 10h Function 02h - Set cursor position

**Call:** AH = 02h  
DH = line  
DL = column

**Return:** none

#### 9.1.3. INT 10h Function 03h - Get current cursor position

**Call:** AH = 03h

**Return:** AX = 00h  
DH = line  
DL = column

#### 9.1.4. INT 10h Function 06h/07h - Scroll current page up/down

**Call:** AH = 05h/06h  
BH = New color attribute

**Return:** none

**Description:** Since the 386EX-Card III does not have video hardware, this function serves only to clear the screen of the terminal PC with the given color attribute.

#### 9.1.5. INT 10h Function 09h - Write char/attribute to screen

**Call:** AH = 09h  
AL = Character  
BL = Color attribute  
CX = Number of characters

**Return:** none

**Description:** The character is output CX times with the indicated color attribute. The cursor position is not changed. Different than on a normal PC, the color attribute applies to all following outputs from the functions 00h, 0Ah and 0Eh.

#### 9.1.6. INT 10h Function 0Ah - Write character to screen

**Call:** AH = 0Ah  
AL = Character  
CX = Number of characters

**Return:** none

**Description:** The character is output CX times. Other than on the screen of a normal PC, the cursor position is incremented since a terminal program does so automatically.

**9.1.7. INT 10h Function 0Eh - Write teletype to screen**

**Call:** AH = 0Eh  
AL = Character

**Return:** none

**Description:** The character in AL is output, whereby the control characters 07h (Beep), 08h (backspace), 0Ah (line feed) and 0Dh (carriage return) are interpreted. This is the fastest way to send a character, since escape sequences do not have to be sent.

**9.2. INT 11h - Equipment Check Service**

**Call:** none

**Return:** AX = Contents of 40:10h  
 Bits 15 - 14 = Number of printers  
 Bits 13 - 12 = Reserved  
 Bits 11 - 9 = Number of diskettes  
 Bit 8 = Reserved  
 Bits 5 - 4 = Video mode  
 Bit 3 = Reserved  
 Bit 2 = Mouse installed  
 Bit 1 = Coprocessor  
 Bit 0 = Boot disk present

**Description:** This function returns the content of memory cells 40:10h.

**9.3. INT 12h - Memory Size**

**Call:** none

**Return:** AX = Contents of 40:13h

**Description:** This function returns the content of memory cells 40:13h. This gives the free memory in Kilobytes.

**9.4. INT 13h - Disk Services**

Since the 386EX-Card III Flash disk is organized like a hard drive, the following also applies to it.

**9.4.1. INT 13h Function 01h - Read disk status**

**Call:** AH = 01h  
DL = Drive (0 oder 1)

**Return:** AH = 0 No error  
= or error code  
CF = 0 No error  
= 1 Error

**Description:** Reads, and then resets, the last error code.

**9.4.2. INT 13h Function 02h - Read disk sectors**

**Call:** AH = 02h  
AL = Number of sectors  
CH = Track  
CL = Sector  
DH = Head  
DL = Drive (0 oder 1)  
ES:BX = Pointer to the sector buffer

**Return:** AH = 0 No error  
= or error code  
AL = Number of sectors read

CF = 0 No error  
= 1 Error

**Description:** This function reads the indicated number of sectors into a buffer.

#### 9.4.3. INT 13h Function 03h - Write disk sectors

**Call:** AH = 03h  
AL = Number of sectors  
CH = Track  
CL = Sector  
DH = Head  
DL = Drive (0 oder 1)  
ES:BX = Pointer to the sector buffer

**Return:** AH = 0 No error  
= or error code  
AL = Number of sectors read  
CF = 0 No error  
= 1 Error

**Description:** This function writes the given number of sectors to the disk.

#### 9.4.4. INT 13h Function 08h - Read drive parameter

**Call:** AH = 08h  
DL = Drive (0 oder 1)

**Return:** AX = 0  
CH = Last Track  
CL = Last Sector  
DH = Number of heads  
DL = Number of installed drives  
ES:DI = Pointer to Diskette Parameter Table  
CF = 0 No error  
= 1 Error

**Description:** This function returns a drive's parameters.

### 9.5. INT 14h – Functions of the Asynchronous Serial Interfaces

#### 9.5.1. INT 14h Function 00h – Initialize Serial Interface

**Call:** AH = 00h  
AL = Parameter

Bits 7 - 5	=	Baud rate:	
		000	= 110 Baud
		001	= 150 Baud
		010	= 300 Baud
		011	= 600 Baud
		100	= 1200 Baud
		101	= 2400 Baud
		110	= 4800 Baud
		111	= 9600 Baud
Bits 4 - 3	=	Parity	
		x0	= none
		01	= uneven
		11	= even
Bit 2	=	Stop bits	
		0	= 1 stop bit
		1	= 2 stop bits
Bit 1 - 0	=	Data word length:	
		00	= 5 bits
		01	= 6 bits
		10	= 7 bits

DX = Number of the serial interface (0 - 3) 11 = 8 bits

**Return:** AH = Line status as with function 1

AL = Modem status

#### 9.5.2. INT 14h Function 01h – Send character

**Call:** AH = 01h

AL = Character to be sent

DX = Number of the serial interface (0 - 3)

**Return:** AL = Character sent

AH = Line status:

- Bit 7 = 1 : Timeout error
- Bit 6 = 1 : Transmitter shift register empty
- Bit 5 = 1 : Transmitter buffer register empty
- Bit 4 = 1 : Break condition = RXD low for the duration of more than one word length
- Bit 3 = 1 : Framing error = invalid stop bit
- Bit 2 = 1 : Parity error
- Bit 1 = 1 : Overrun error = receive buffer overwritten
- Bit 0 = 1 : Receive data ready

#### 9.5.3. INT 14h Function 02h – Receive character

**Call:** AH = 02h

**Return:** AL = Received character

AH = Line status as with function 1

DX = Number of the serial interface (0 - 3)

**Remark:** A timeout occurs after approximately 1 second. The serial interfaces are operated with interrupts or in polling mode, depending upon the applicable setting in the BIOS setup.

#### 9.5.4. INT 14h Function 03h – Query the status of a serial interface

**Call:** AH = 03h

DX = Number of the serial interface (0 - 3)

**Return:** AH = Line status as with Function 1

#### 9.5.5. INT 14h Function 04h - Extended Initialization

**Call:** AH = 04h

BH = Parity

00h = no parity.

01h = odd parity.

02h = even parity.

BL - Stop bits

00h = 1 stop bit

01h = 2 stop bits or 1,5 in the case of 5 databits

CH - Data length

00h = 5 bits

01h = 6 bits

02h = 7 bits

03h = 8 bits

CL - Baud rate

00h = 110 Baud

01h = 150 Baud

02h = 300 Baud

03h = 600 Baud

04h = 1200 Baud

05h = 2400 Baud

06h = 4800 Baud

07h =	9600 Baud
08h =	19200 Baud
09h =	38400 Baud
0Ah =	57600 Baud
0Bh =	115200 Baud

DX = Number of the serial interface (0 - 3)

**Return:** AH = Line status as with function 1  
AL = Modem status

**Remark:** This function permits higher baud rates than function 00h.

## 9.6. INT 15h - System Services

### 9.6.1. INT 15h Function 24h - A20 gate control

### 9.6.2. INT 15h Function 87h - Move memory block

### 9.6.3. INT 15h Function C0h - Get system config table

**Call:** AH = C0h

**Return:** AH = 00h  
ES:BX = Address of System Config Table

**Description:** This function delivers the address of the System Configuration Table.

### 9.6.4. INT 15h Function A1h - Int 10h / Int 16h redirect I/O

This function redirects the BIOS Int 10h video output and the Int 16h keyboard input functions to a serial interface. The parameter 0 (none) turns off all Int 10h and Int 16h input and output operations.

**Call:** AH = A1h  
BX = COM port (1 = COM1, ..., 4 = COM4, 0 = none)

## 9.7. INT 15h Function C3h - Functions Specific to the 386EX-Card III

### 9.7.1. INT 15h Function C301h – Enable Watchdog

**Call:** AH = C3h  
AL = 01h  
BX = Duration of the Watchdog timeout in milliseconds

**Return:** --

**Description:** This function activates the watchdog. Subsequently, the watchdog must be reset at least once within the watchdog timeout limit, otherwise a system reset is triggered.

Once released, the watchdog can be deactivated only by a system reset. The timeout duration can no longer be changed, either.

### 9.7.2. INT 15h Function C302h – Reset Watchdog

**Call:** AH = C3h  
AL = 02h

**Return:** --

**Description:** After activation of the watchdog, this function must be called at least once within the watchdog timeout limit, otherwise a system reset is triggered.

### 9.7.3. INT 15h Function C310h – Query processor clock rate

**Call:** AH = C3h  
AL = 10h

<b>Return:</b>	AL	= 3 : CPU clock rate =	33,33 MHz	(CLK2 = 66,67 MHz)
		= 2 : CPU clock rate =	16,67 MHz	(CLK2 = 33,33 MHz)
		= 1 : CPU clock rate =	8,33 MHz	(CLK2 = 16,67 MHz)
		= 0 : CPU clock rate =	0,922 MHz	(CLK2 = 1,8432 MHz)
		= 7 : CPU clock rate =	30 MHz	(CLK2 = 60 MHz)
		= 6 : CPU clock rate =	25 MHz	(CLK2 = 50 MHz)
		= 5 : CPU clock rate =	12,5 MHz	(CLK2 = 25 MHz)
		= 4 : CPU clock rate =	5 MHz	(CLK2 = 10 MHz)

#### 9.7.4. INT 15h Function C311h – Set processor clock rate

**Call:** AH = C3h  
AL = 11h  
BL = Clock rate as defined for Function C310h above

**Return:** --

**Remark:** The prescaler (CLKPRS) for the input clock rate of Timer 0 is adjusted according to the new clock rate, so the Timer 0 interrupt period will not change.

#### 9.7.5. INT 15h Function C312h – Set CPU in idle mode

**Call:** AH = C3h  
AL = 12h  
BL = *Clock rate*

**Remark:** The CPU core is stopped, but the 386EX's internal peripherals (in particular the timers and the SSIO) keep running. Return from idle mode is possible only by a hardware interrupt.

#### 9.7.6. INT 15h Function C313h – Set CPU in power-down mode

**Call:** AH = C3h  
AL = 13h  
BL = Clock rate as with Function C310h, or  
BL = 80h: Deep Power-Down Mode

**Remark:** The CPU core and the 386EX's internal peripherals CPU core are stopped. The timers continue to run only if they are operated with an external clock. The SSIO functions only in slave mode. In the 386EX-Card III, the UARTs work with their own clock, and thus will still work in power-down mode.

Return from the power down mode is done by RTC interrupts, serial interface interrupts, or external IRQs. The interrupts of Timer 0 and Timer 1 terminate the power-down mode only if operated with an external clock. Since Timer 2 can be operated only with internal clock on the 386EX-Card III, it cannot trigger a return from power-down mode.

In deep power-down mode the clock is completely turned off. This provides the lowest power consumption. The return from deep power-down mode can be accomplished only by the RTC IRQ, or likewise an external signal connected with the RTC IRQ.

#### 9.7.7. INT 15h Function C314h – Synchronous serial interface: Send

**Call:** AH = C3h  
AL = 14h  
BX = Data word  
CL = 4..127: Divisor for Baud rate

**Remark:** For this and the following function the synchronous serial interface works exclusively in master mode without interrupts. The baud rate results from the CPU input clock rate CLK2 (normally 50 MHz for the 386EX-Card III) according to the formula:



$$\text{Baud rate} = \text{CLK2} / (8 \times (\text{CL} + 1))$$

There are also possible baud rates between 1.25 MBaud and 48.8 kBaud. Changing the CPU clock causes an according change of the baud rate.

#### 9.7.8. INT 15h Function C315h – Synchronous serial interface: Receive

**Call:** AH = C3h  
AL = 15h  
CL = 4..127: Divisor for Baud rate

**Return:** AX = Data word

#### 9.7.9. INT 15h Function C320h – Reading EEPROM

**Call:** AH = C3h  
AL = 20h  
BH = Address in EEPROM

**Return:** AL = Data byte

**Description:** This function reads the data byte at the given address in EEPROM.

#### 9.7.10. INT 15h Function C321h – Writing EEPROM

**Call:** AH = C3h  
AL = 21h  
BH = Address in EEPROM  
BL = Data byte

**Description:** This function writes the data byte to the given address in EEPROM.

#### 9.7.11. INT 15h Function C322h - I2C bus: Read byte with address byte

**Call:** AH = C3h  
AL = 22h  
BH = I2C bus Address  
CH = I2C-chip Address

**Return:** AL = I2C bus data byte reading  
Carry Flag = 0: No error  
Carry Flag = 1: Error

#### 9.7.12. INT 15h Function C323h - I2C bus: Write byte with address byte

**Call:** AH = C3h  
AL = 23h  
BH = I2C bus address  
BL = I2C bus data byte  
CH = I2C-chip address

**Return:** Carry Flag = 0: No error  
Carry Flag = 1: Error

#### 9.7.13. INT 15h Function C324h - I2C bus: Read data block with 2 address bytes

**Call:** AH = C3h  
AL = 24h  
BX = I2C bus address (BH = first address byte, BL = second address byte)  
CH = I2C-chip address  
CL = Number of bytes to be read (0 == 256)  
ES:DI = Far pointer to read buffer in RAM

**Return:** ES:[DI] = data bytes read  
Carry Flag = 0: No error  
Carry Flag = 1: Error

**9.7.14. INT 15h Function C325h - I2C bus: Write data block with 2 address bytes**

**Call:**

AH	=	C3h
AL	=	25h
BX	=	I2C bus address (BH = first address byte, BL = second address byte)
CH	=	I2C-chip address
CL	=	Number of bytes to be written (0 == 256)
ES:SI	=	Far pointer to write buffer

**Return:**

Carry Flag = 0:	No error
Carry Flag = 1:	Error

**9.7.15. INT 15h Function C326h – Request I2C bus**

**Call:**

AH	=	C3h
AL	=	26h

**Return:**

Carry Flag = 0:	I2C bus successfully requested
Carry Flag = 1:	I2C bus was in use

**Description:** Since I2C bus cycles may not overlap in the 386EX-Card III, the bus should be requested before each transmission. The associated I2C bus flag is set and prevents further I2C bus functions from interrupting the current function. This is of importance only if I2C functions are to be implemented within interrupt routines.

**9.7.16. INT 15h Function C327h – Enable I2C bus**

**Call:**

AH	=	C3h
AL	=	27h

**Description:** The I2C bus flag is reset. If the I2C bus was requested before with the function C326h, it must be reset with this function, otherwise no further I2C bus access is possible.

**9.7.17. INT 15h Function C328h – I2C Bus: Read byte with 2 address bytes**

**Call:**

AH	=	C3h
AL	=	28h
BH	=	I2C bus address 0
CH	=	I2C chip address
CL	=	I2C bus address 1

**Return:**

AL	=	I2C bus data byte reading
Carry Flag = 0:	No error	
Carry Flag = 1:	Error	

**9.7.18. INT 15h Function C329h - I2C bus: Write byte with 2 address bytes**

**Call:**

AH	=	C3h
AL	=	29h
BH	=	I2C bus address 0
BL	=	I2C bus data byte
CH	=	I2C chip address
CL	=	I2C bus address 1

**Return:**

Carry Flag = 0:	No error
Carry Flag = 1:	Error

**9.7.19. INT 15h Function C32Ah – I2C bus: Read byte**

**Call:**

AH	=	C3h
AL	=	2Ah
CH	=	I2C chip address

**Return:**

AL	=	I2C bus data byte reading
Carry Flag = 0:	No error	
Carry Flag = 1:	Error	

**9.7.20. INT 15h Function C32Bh - I2C bus: Write byte**

**Call:** AH = C3h  
AL = 2Bh  
BL = Data byte  
CH = I2C chip address

**Return:** Carry Flag = 0: No error  
Carry Flag = 1: Error

**9.7.21. INT 15h Function C32Ch - I2C bus: Read two bytes**

**Call:** AH = C3h  
AL = 2Ch  
CH = I2C-Chip Address

**Return:** AX = Data word reading (AH = first byte, AL = second byte)  
Carry Flag = 0: No error  
Carry Flag = 1: Error

**9.7.22. INT 15h Function C32Dh - I2C bus: Write two bytes**

**Call:** AH = C3h  
AL = 2Dh  
BH = First data byte  
BL = Second data byte  
CH = I2C chip address

**Return:** Carry Flag = 0: No error  
Carry Flag = 1: Error

**9.7.23. INT 15h Function C32Eh - I2C bus: Read data block**

**Call:** AH = C3h  
AL = 2Eh  
CH = I2C chip address  
CL = Number of bytes to be read (0 == 256)  
ES:DI = Far pointer to read buffer in RAM

**Return:** [ES:DI] = Data read  
Carry Flag = 0: No error  
Carry Flag = 1: Error

**9.7.24. INT 15h Function C32Fh - I2C bus: Write data block**

**Call:** AH = C3h  
AL = 2Fh  
CH = I2C-Chip Address  
CL = Number of bytes to be read (0 == 256)  
ES:SI = Far pointer to write buffer

**Return:** Carry Flag = 0: No error  
Carry Flag = 1: Error

**9.7.25. INT 15h Function C330h – Query hardware serial number**

**Call:** AH = C3h  
AL = 30h

**Return:** AX = lower serial number data word  
BX = middle serial number data word  
CX = upper serial number data word

**Description:** This Function reads the six bytes of the 386EX-Card III's hardware serial number. Each 386EX-Card III unit has its own unique serial number.

## 9.8. INT 16h - Keyboard Service

### 9.8.1. INT 16h Function 00h - Read keyboard input

**Call:** AH = 00h

**Return:** AH = Scan code extended keys  
AL = Key value

**Description:** This function reads in a key. Only some extended keys are supported, since ANSI escape sequences are used for this (see chapter 10).

### 9.8.2. INT 16h Function 01h - Read keyboard status

**Call:** AH = 01h

**Return:** ZF = 1 - No character present  
= 0 - Character present

**Description:** This function ascertains whether a character is in the keyboard buffer. Different from a normal PC, the character in the buffer is not returned.

### 9.8.3. INT 16h Function 05h – Simulate pressing of a key

**Call:** AH = 05h  
CH = Key's scan code  
CL = Key's ASCII code

**Return:** AL = 0 – Function succeeded  
= 1 – Keyboard buffer was full

**Description:** A user program can write values to the BIOS keyboard buffer with this function.

## 9.9. INT 17h - Parallel Service

### 9.9.1. INT 17h Function 00h - Print character

**Call:** AH = 00h  
AL = Character  
DX = LPT port (0 - 2)

**Return:** AH = Printer status  
Bit 7 = 1 Printer available  
Bit 6 = 1 Acknowledgment  
Bit 5 = 1 Out of paper  
Bit 4 = 1 Printer selected  
Bit 3 = 1 Printer error  
Bit 2 - 1 = Reserved  
Bit 0 = Timeout error

**Description:** This function outputs a character.

### 9.9.2. INT 17h Function 01h - Initialize printer

**Call:** AH = 01h  
DX = LPT Port (0 - 2)

**Return:** AH = Printer Status  
Bit 7 = 1 Printer available  
Bit 6 = 1 Acknowledgment  
Bit 5 = 1 Out of paper  
Bit 4 = 1 Printer selected  
Bit 3 = 1 Printer error  
Bit 2 - 1 = Reserved  
Bit 0 = Timeout error

**Description:** This resets the printer.

**9.9.3. INT 17h Function 02h - Get printer status**

**Call:** AH = 02h  
DX = LPT Port (0 - 2)

**Return:** AH = Printer Status  
 Bit 7 = 1 Printer nicht besetzt  
 Bit 6 = 1 Acknowledgment  
 Bit 5 = 1 Out of paper  
 Bit 4 = 1 Printer selected  
 Bit 3 = 1 Printer error  
 Bit 2 - 1 = Reserved  
 Bit 0 = Timeout error

**Description:** The status of the printer is read out.

**9.10. INT 18h - Boot Failure**

**Description:** This function is activated after unsuccessful boot attempts.

**9.11. INT 19h - Boot System**

**Description:** This function is activated after a complete initialization of the BIOS. It is activated to execute its own routine by the ROM-DOS. If ROM-DOS is not present or is deactivated, the BIOS default handler tries to load the operating system from the flashdisk or ROM disk. If this fails, an INT 18h is executed.

**9.12. INT 1Ah - Clock and Timer Functions****9.12.1. INT 1Ah Function 00h - Read system timer**

**Call:** AH = 00h

**Return:** AH = 00h  
AL = 24h Overrun Flag  
CX:DX = System ticks since midnight

**Description:** This function reads the system timer variable at address 40h:6Ch. This 32-bit variable is incremented by the timer 0 interrupt 18.2 times per second. It is set to zero every 24 hours (which is supposed to happen at midnight). At boot time, the system timer variable is synchronized with the real time clock (see function 9). The DOS system time is derived from this variable.

**9.12.2. INT 1Ah Function 01h - Set system timer**

**Call:** AH = 01h  
CX:DX = new value for timer variable

**Return:** AH = 00h

**Description:** This function sets the system timer variable at address 40h:6Ch.

**9.12.3. INT 1Ah Function 02h - Read real-time clock**

**Call:** AH = 02h

**Return:** AH = 00h  
AL = Hours BCD  
CH = Hours in BCD  
CL = Minutes in BCD  
DH = Seconds in BCD  
CF = 0: OK  
CF = 1: Error

**Description:** This function reads out the time from the RTC.

**9.12.4. INT 1Ah Function 03h - Set real-time clock**

**Call:** AH = 03h  
AL = Hours in BCD  
CH = Hours in BCD  
CL = Minutes in BCD  
DH = Seconds in BCD

**Return:** AH = 00h  
CF = 0: OK  
CF = 1: Error

**Description:** This function sets the time of the RTC.

**9.12.5. INT 1Ah Function 04h – Read RTC date**

**Call:** AH = 04h

**Return:** CH = Century (19 or 20)  
CL = Year  
DH = Month  
DL = Day

**Description:** This function reads out the date from the RTC.

**9.12.6. INT 1Ah Function 05h – Set RTC date**

**Call:** AH = 05h  
CH = Century (19 or 20)  
CL = Year  
DH = Month  
DL = Day

**Return:** CF = 0: OK  
CF = 1: Error

**Description:** This function sets the date of the RTC.

**9.12.7. INT 1Ah Function 06h – Set / Enable RTC interrupt**

**Call:** AH = 06h  
CH = Hour  
CL = Minute  
DH = Second

**Return:** CF = 0: OK  
CF = 1: Error (e.g., an interrupt is already programmed)

**Description:** The real-time clock generates an interrupt at the programmed time on the same day. This is an impulse of approximately 10...40ms duration. The user program can set the 4Ah interrupt vector to a function of the program, which will then be called every time the RTC IRQ is activated. If this interrupt is only used to return from power-down mode, linking of the 4Ah interrupt is not necessary.

The values for hour, minute and second must be coded in BCD. Only one single interrupt time is valid at any time. If an interrupt time is already programmed, it must first be disabled with Function 07h.

**9.12.8. INT 1Ah Function 07h – Disable RTC interrupt**

**Call:** AH = 07h

**Return:** CF = 0: OK  
CF = 1: Error

**Description:** A programmed interrupt time can be cleared with this function. The RTC interrupts will then cease to be generated. This function must also be called in order to change the interrupt time; a new time can be programmed with Function 06h only after calling this function.

**9.12.9. INT 1Ah Function 08h : Synchronize system timer****Call:** AH = 08h**Return:** CF = 0: OK  
CF = 1: Error**Description:** This function sets the system timer variable at address 40h:6Ch according to the real time clock. This 32-bit variable is incremented by the timer 0 interrupt 18.2 times per second.**9.12.10. INT 1Ah Function 09h : Set cyclical interrupt****Call:** AH = 09h  
AL = 0: Interrupt every 1/4096 seconds  
1: Interrupt each second  
2: Interrupt each minute  
3: Interrupt each hour  
4: Interrupt each day**Return:** CF = 0: OK  
CF = 1: Error**Remark:** This function is hardware-dependent, and thus not compatible to a normal PC's BIOS.**9.13. INT 1Bh to 1Fh**

These interrupt vectors do not point to an executable function, but to various BIOS tables.

**9.14. INT 5Fh - Flash Services****9.14.1. INT 5Fh Function 00h - Erase Flash block****Call :** AH = 00h  
DX:DI = 32-bit block start address  
= 32-bit Flash start address + 10000h \* block number

depending on whether one or two Flash ICs are installed

**Return:** Carry Flag = 0: No error  
Carry Flag = 1: Error**Description:** (See also Function 02h). Deletion of a 64kB Flash block.**9.14.2. INT 5Fh Function 01h - Read Flash block****Call:** AH = 01h  
DX:DI = 32-bit source address (first byte to be read)  
= Flash start address + 10000h \* block number + offset  
ES:BX = Target address (Far pointer to data buffer in RAM)  
CX = Number of bytes to be read**Return:** [ES:BX] = Data reading  
Carry Flag = 0: No error  
Carry Flag = 1: Error**Description:** "Offset" indicates the start address relative to the beginning of the block. The source address is a 32-bit address, since the Flash memory is addressed in protected mode. The target address (in RAM) is a real-mode address, and thus in the form *Segment:Offset*. Flash start depends on the configuration: 1MB: 3F00000h, 2MB: 3E00000h, 4MB: 3C00000h, 8MB: 3800000h.**9.14.3. INT 5Fh Function 02h - Write Flash block****Call:** AH = 02h  
DX:DI = 32-bit target address

ES:BX = source address (Far pointer to data buffer)  
CX = number of bytes to write

**Return:** Carry Flag = 0: No error  
Carry Flag = 1: Error

**Description:** (See also Function 02h). This function does not implement a delete operation. If the range to be written is not cleared, the function returns an error.

#### 9.14.4. INT 5Fh Function 03h - Erase and write Flash block

**Call:** AH = 03h  
DX:DI = 32-bit target address  
ES:BX = Source address (Far pointer to data buffer)  
CX = Number of bytes to be written

**Return:** Carry Flag = 0: No error  
Carry Flag = 1: Error

**Description:** (See also Function 02h). The relevant Flash block will be cleared before being written to.

#### 9.14.5. INT 5Fh Function 04h - Read Flash chip and manufacturer ID

**Call:** AH = 04h  
DX:DI = 32-bit source address = 03F0:0000  
ES:BX = target address (Far pointer to data buffer in RAM)

**Return:** [ES:BX] = Device ID  
[ES:BX + 2] = Manufacturer ID  
Carry-Flag = 0: No error  
Carry-Flag = 1: Error

**Description:** Reads out the Flash-IC's ID code. Depending upon the specific installation, the following ID codes are, for example, possible (the list is not complete):

29LV800BT: 22DAh  
29LV160BT: 22C4h  
29LV320DT: 22F6h  
29LV641D : 22D7h  
Manufacturer: AMD: 01, Fujitsu: 04, ST: 20h



## 10. Tables

### 10.1. I/O Addresses

Port Address	Function
00h – 0Fh	DMA Controller
20h – 21h	1. Interrupt Controller (Master)
22h – 23h	386EX Control Register
40h – 43h	Timer 0, 1 and 2
80h – 83h	DMA Page Register *
92h	A20 Gate, CPU Reset
A0h – A1h	2. Interrupt Controller (Slave)
2F8h – 2FFh	COM2
300h – 30Fh	PIF CS0
310h – 31Fh	PIF CS1
320h – 32Fh	PIF CS2
330h – 33Fh	PIF CS3
340h – 34Fh	CS8900A Ethernet Controller
3F8h – 3FFh	COM1
<b>F000h – FFFFh</b>	<b>386EX Peripherals:</b>
F480h – F48Bh	Synchronous Serial Interface
F860h	I/O-Port P1 Input
F862h	I/O-Port P1 Output
F864h	I/O-Port P1 Direction: 1 = input or open drain output
F868h	I/O-Port P2 Input
F86Ah	I/O-Port P2 Output
F86Ch	I/O-Port P2 Direction: 1 = input or open drain output
F870h	I/O-Port P3 Input
F872h	I/O-Port P3 Output
F874h	I/O-Port P3 Direction: 1 = input or open drain output

## 10.2. Interrupt Table

Vector	Address	Usage	Service Routine via	Type
00h	000h	Divide by Zero	BIOS or Application	CPU Exception
01h	004h	Single-Step Debug Interrupt	Debugger	CPU Exception
02h	008h	Non-Maskable Interrupt (NMI)	Application	Hardware NMI
03h	00Ch	One-Byte Debug Breakpoint	Debugger	CPU Command
04h	010h	Overflow (called with INTO command)	Application	CPU Exception
05h	014h	Array Bounds Check (called with BOUNDS command)	Application	CPU Exception
06h	018h	Invalid Command Code	Debugger	CPU Exception
07h	00Ch	Coprocessor not available	Application	CPU Exception
08h	020h	Timer 0 (System Timer)	BIOS	Hardware IRQ0
09h	024	PIF-bus IRQ (PIF INT)	Application	Hardware IRQ1
0Ah	028h	Reserved	BIOS	Software
0Bh	02Ch	Serial Interface (COM2)	BIOS or Application	Hardware IRQ3
0Ch	030h	Serial Interface (COM1)	BIOS or Application	Hardware IRQ4
0Dh	034h	Available for Application	Application	Hardware IRQ5
0Eh	038h	Available for Application	Application	Hardware IRQ6
0Fh	03Ch	Available for Application	Application	Hardware IRQ7
10h	040h	Video Functions	BIOS	Software
11h	044	System Configuration (Equipment Check)	BIOS	Software
12h	048h	RAM Size	BIOS	Software
13h	04Ch	Disk Functions	BIOS	Software
14h	050h	Serial Port Functions (COM1-4)	BIOS	Software
15h	054h	Diverse, including 386EX-Card III-specific functions	BIOS	Software
16h	058h	Keyboard Functions	BIOS	Software
17h	05Ch	Parallel Port Functions (LPT)	BIOS	Software
18h	060h	Boot Error	BIOS	Software
19h	064h	Boot Loader	BIOS or DOS	Software
1Ah	068	System-Timer and RTC Functions	BIOS	Software
1Bh	06Ch	Reserved	BIOS	Software
1Ch	070h	Timer User Function (called from Int 08h)	Application	Software
1Dh	074h	Reserved	BIOS	Software
1Eh	078h	Disk Parameter Table	--	BIOS Table
1Fh	07Ch	Reserved	BIOS	Software
20h – 3Fh	80h – 0FCh	Reserved for DOS	DOS	Software
40h – 49h	100h – 124h	Reserved for BIOS	BIOS	Software
4Ah	128h	RTC User Function (called from Int 70h)	Application	Software
4Bh – 5Eh	12Ch – 178h	Reserved for BIOS	BIOS	Software
5Fh	17Ch	Flash Functions	Application	Software
60h – 6Fh	180h – 1BCh	Network Drivers (i.e. Rdrive, Packet Driver, Datalight Sockets) Partly Available for Application	Application	Software

Interrupt Table (cont.)

Vector	Address	Usage	Service Routine via	Type
70	1C0	Real-Time Clock (RTC) Alarm	BIOS	Hardware IRQ8
71	1C4	Synchronous Serial Interface or Available for Application	BIOS or Application	Hardware IRQ9
72	1C8	Timer 1	LCD-BIOS Extension or Application	Hardware IRQ10
73	1CC	Timer 2	Application	Hardware IRQ11
74	1D0	Reserved (DMA)	--	Hardware IRQ12
75	1D4	Available for Application	Application	Hardware IRQ13
76	1D8	IDE (Compact-Flash)	BIOS	Hardware IRQ14
77	1DC	386EX Watchdog Timer	Application	Hardware IRQ15
78 – FF	1E0 – 3FC	Available for Application	Application	Software

### 10.3. Connectors

#### 10.3.1. Connector X1: PIF-Bus

Pin	Signal	Pin	Signal
1	GND	2	GND
3	VCC	4	n.c. (VEE)
5	/WR	6	/RD
7	/CS0	8	A0
9	A1	10	/Reset
11	D0	12	D1
13	D2	14	D3
15	D4	16	D5
17	D6	18	D7
19	Ready	20	A2
21	A3	22	/CS1
23	/CS2	24	/CS3
25	/IRQ1	26	GND

#### 10.3.2. Connector X2: I/O

Pin	Signal		Pin	Signal	
1	VCC		2	COM1 /DSR	I/O P1.3
3	COM1 /RI	I/O P1.4	4	COM1 RXD	I/O P2.5
5	COM1 TXD	I/O P2.6	6	COM1 /DTR	I/O P1.2
7	COM1 /RTS	I/O P1.1	8	COM1 /CTS	I/O P2.7
9	COM1 /DCD	I/O P1.0	10	GND	
11	Timer 2 Gate		12	Timer 2 Out	
13	Timer 2 Clock		14	Timer 1 Out	IRQ3 I/O P3.1
15	IRQ9	Timer 0 Gate	16	Timer 1 Clock	IRQ13
17	I/O P3.0	IRQ4	18	COM-Clock (1,8432 MHz)	
19	/RTC-On	IRQ8	20	I/O P3.3	IRQ5
21	IRQ6	I/O P3.4	22	I/O P3.5	IRQ7
23	VUNST		24	VBATT	
25	/RESET PIF		26	GND	

#### 10.3.3. Connector X3: COM2, synchronous serial port (SSIO), DMA

Pin	Signal		Pin	Signal	
1	VCC		2	COM2 /DSR	STXCLK
3	/RI (COM2)	SSIORX	4	COM2 RXD	DRQ1 (DMA)
5	TXD (COM2)	/DACK1 (DMA)	6	COM2 /DTR	SRXCLK
7	/RTS (COM2)	SSIOTX	8	COM2 /CTS	/TC (DMA)
9	/DCD (COM2)	DRQ0 (DMA)	10	GND	

**10.3.4. Connector X6: JTAG / I<sup>2</sup>C-Bus**

PIN	Signal
1	VCC
2	SDA (I <sup>2</sup> C-Bus)
3	SCL (I <sup>2</sup> C-Bus)
4	GND
5	TMS (JTAG)
6	TCK (JTAG)
7	TDO (JTAG)
8	TDI (JTAG)

**10.3.5. Connector X8: Ethernet Twisted Pair**

PIN	Signal
1	TXD+
2	TXD-
3	RXD+
4	RXD-

#### 10.4. ANSI Escape Sequences Used by the BIOS

The following escape sequences are used by the video BIOS (INT 10h):

Escape Sequence	Meaning	INT 10h
ESC[ # ; # H	Set cursor position	02h
ESC[ 6 n	Status request	03h
ESC[ s	Save cursor position	09h, 0Ah
ESC[ u	Restore cursor position	09h, 0Ah
ESC[ 2 J	Erase screen	00h, 0Eh
ESC[ # ; ... ; # m	Set colors	06h, 07h, 09h

The following escape sequences are recognized by the keyboard BIOS (INT 16h):

Taste	Normal	+ Shift	+ Ctrl	+ Alt
F1	ESC[M	ESC[Y	ESC[k	ESC[w
F2	ESC[N	ESC[Z	ESC[l	ESC[x
F3	ESC[O	ESC[a	ESC[m	ESC[y
F4	ESC[P	ESC[b	ESC[n	ESC[z
F5	ESC[Q	ESC[c	ESC[o	ESC[@
F6	ESC[R	ESC[d	ESC[p	ESC[[
F7	ESC[S	ESC[e	ESC[q	ESC[\
F8	ESC[T	ESC[f	ESC[r	ESC[]
F9	ESC[U	ESC[g	ESC[s	ESC[^
F10	ESC[V	ESC[h	ESC[t	ESC[_
Left	ESC[D		Home	ESC[H
Right	ESC[C		End	ESC[F
Up	ESC[A		PgUp	ESC[I
Down	ESC[B		PgDown	ESC[G
Insert	ESC[L			


**10.5. Electrical Data**

Ambient temperature 25°C, unless otherwise indicated.

Symbol	Description	Parameter	Min.	Typ.	Max.	Unit
Vcc	Operating Voltage		4,75	5	5,25	V
Tamb	Operating Ambient Temperature		-40		+85	°C
Vres	Reset Threshold		4,5	4,65	4,75	V
Vnmi	Power-Fail Comparator-Threshold (for NMI)	Monitors External Vunst Voltage	1,20	1,25	1,30	V
Icc	Operating Current at Maximum Clock Rate	CLK2 = 66,6 MHz		320	400	mA
		CLK2 = 33,3 MHz		180		mA
		CLK2 = 16,7 MHz		105		mA
		CLK2 = 1,5 MHz		38		mA
	Idle-Mode:					
		CLK2 = 66,6 MHz		100		mA
		CLK2 = 33,3 MHz		66		mA
		CLK2 = 16,7 MHz		50		mA
		CLK2 = 1,5 MHz		37		mA
	Deep Powerdown	CLK2 = 0		6,5		mA
Vbatt	Battery Voltage (for SRAM and RTC)		2,0	3	5,25	V
	Battery Data according to Manufacturer	Lithium-Battery Renata CR2032RH				
Cbatt	Battery Capacity			200		mAh
Tbatt	Operating Temperature		-20		70	°C
	Self Discharge Rate	T <sub>amb</sub> = 25°C			1%	1/Jahr
Ibatt	Battery Current with Vcc disconnected	1MB SRAM installed V <sub>batt</sub> = 3V T <sub>amb</sub> = 25°C		5		µA
		T <sub>amb</sub> = 70°C				µA
		T <sub>amb</sub> = 85°C				µA

\* The nominal clock rate – according to which the command times of the CPU are given – is 50% of the CLK2 oscillator frequency.

## 11. Drawing 386EX-Card III

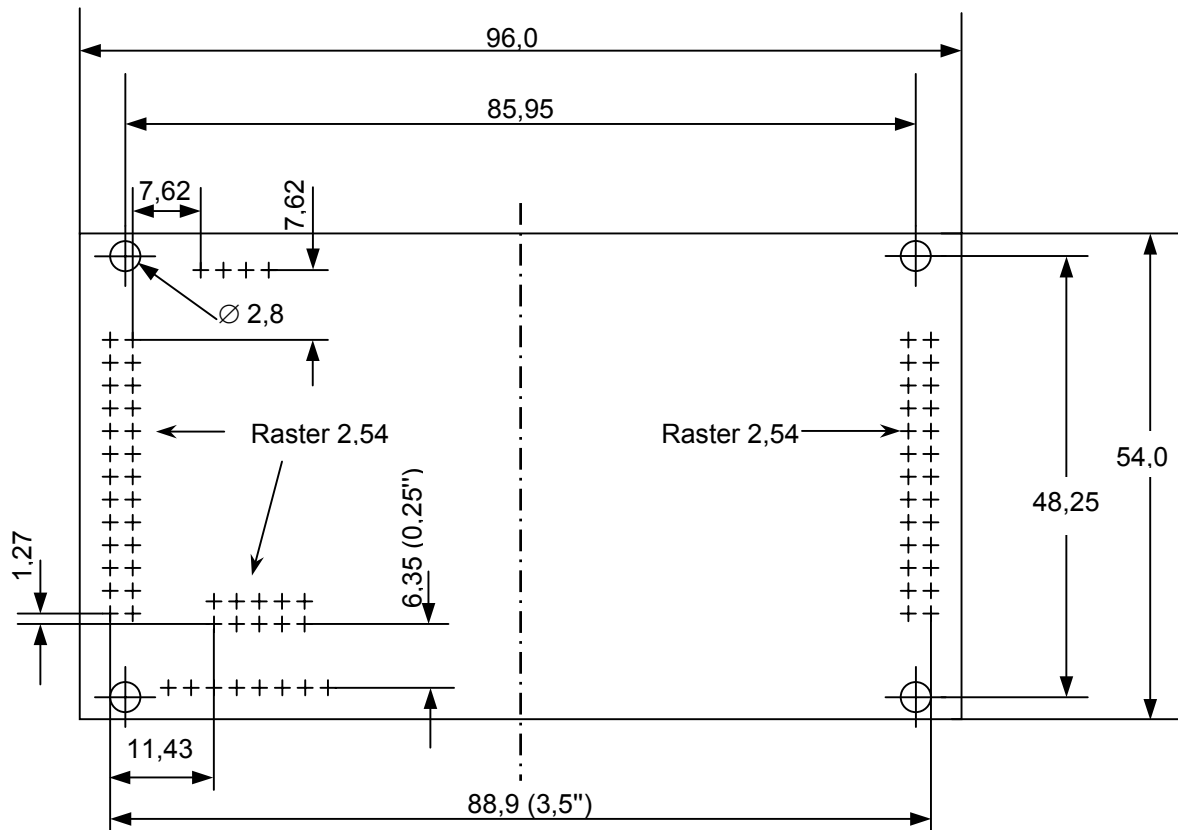

The headers X1 (PIF), X2 (I/O), and X8 (Ethernet) have a relative position according to a 0.1" grid.

Header X3 (SIO1) and X6 (I2C, JTAG) have a relative position to PIF und I/O according to a 0.05" grid.

Height of parts on the front side::	4,2 mm
Height of parts on the back side:	2,5 mm
Thickness of PCB:	1,6 mm
Height of headers::	9 mm