



# Instant GALILEO/GPS/GLONASS service indoors GNSS-L1G1GA-IP67

## Key Features

- Automatic gain limitation
- Oscillation prevention with indicator
- Maximal coverage for CE approved repeater
- Instant GALILEO/GPS/GLONASS fix when moving indoors and outdoors
- Full product family with repeaters, amplifiers and splitters



**Emergency  
stations and  
depots**




**Asset management  
in control room**

**Tunnels and traffic  
stations**




**Ships and vessels**

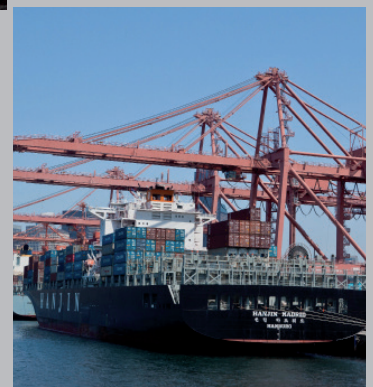

# How does Roger repeater work?

ROGER GALILEO/GPS/GLONASS repeater operates by receiving satellite signals with an antenna located outside the building and re-radiating the signals to the indoor area or covered space.

Use of re-radiated signals indoors means that GALILEO/GPS/GLONASS receiver is tracking the current status and signal from the satellites. When a GALILEO/GPS/GLONASS receiver is moved from covered area to outdoors and vice versa, the receiver is instantly tracking the location instead of time consuming acquisition.

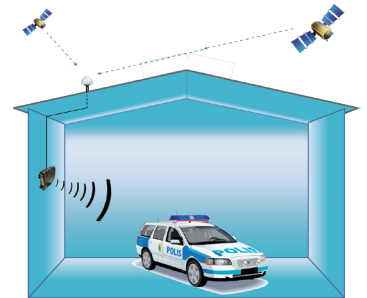

## Technical information

Frequency:	GALILEO (1.57542 GHz) GPS L1 (1.57542 GHz) GLONASS L1 (1.602 GHz)
Size:	200*89*39 mm
Weight:	274 g
Casing:	IP67
Overall gain:	> 40 db
Adjustable Gain:	0-40 db
Impedance:	50 Ohm
Input connector:	TNC-female
Operating temperature:	-40 - +75 °C
Power supply:	+12VDC/300mA
Indoor coverage:	upto 50 meters
Antenna power output:	+ 5 VDC, 100 mA
TX Antenna gain:	max. +4dBd, RHCP polarisized

## ROGER™ GNSS products:

Latest Product information can be found on  
<http://www.gps-repeating.com/>

or email us to

[roger@gps-repeating.com](mailto:roger@gps-repeating.com)

