



Samsung  
**ARTIK**<sup>™</sup> Modules


**7**

**710 Product Brief**



ARTIK 710 Module Top View

Samsung’s ARTIK™ 710 Module is a highly-integrated System-On-Module that utilizes an octa-core ARM® Cortex®-A53 processor packaged DRAM and Flash memory, a hardware Secure Element and a wide range of wireless communication options such as Gigabit Ethernet, 802.11a/b/g/n/ac, Bluetooth® 4.1 (Classic+BLE) and 802.15.4 (ZigBee® or Thread) communications all on an extremely compact footprint. The many standard digital control interfaces support external sensors and higher performance peripherals to expand the module capabilities. With the combination of Wi-Fi, Bluetooth, ZigBee/Thread, the ARTIK 710 Module is the perfect choice for home automation and home hub devices, while also supporting a rich UI/UX capability with the camera and display support options. The hardware based Secure Element works with the ARM® TrustZone® and Trustonic’s Trusted Execution Environment (TEE) to provide enhanced end-to-end security.

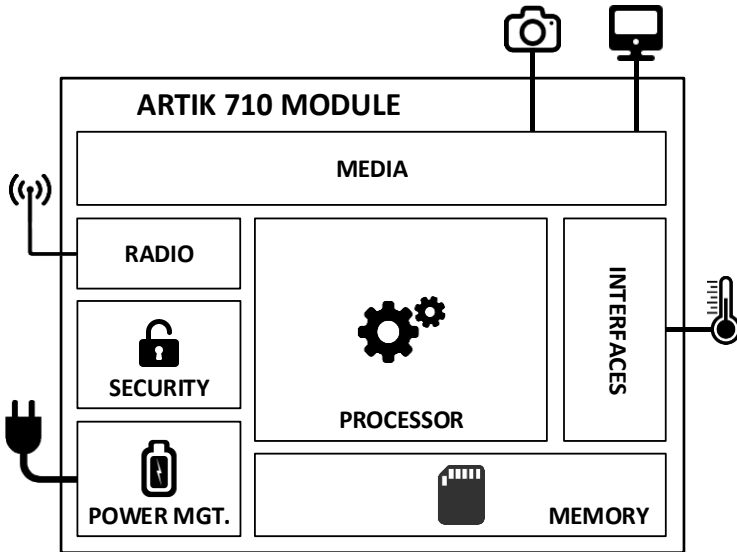


ARTIK 710 Module Block Diagram

<b>Processor</b>	
CPU	8x ARM® Cortex®-A53@1.4GHz
GPU	Mali T400, 3D graphics accelerator
<b>Media</b>	
Camera I/F	4-Lane MIPI CSI
Display	4-Lane MIPI DSI up to FHD@24bpp, LVDS, HDMI v1.4
Audio	I²S audio interface
<b>Memory</b>	
DRAM	1GB DDR3 @ 800MHz
FLASH	4GB eMMC v4.5
<b>Security</b>	
Secure Element	Secure point to point authentication and data transfer
Trusted Execution Environment	Trustonic TEE
<b>Radio</b>	
WLAN	IEEE 802.11a/b/g/n/ac standard compliant
Bluetooth	4.1 (Classic+BLE)
802.15.4	ZigBee/Thread
<b>Power Management</b>	
PMIC	Provides all power of the ARTIK 710 Module using on board bucks and LDO's
<b>Interfaces</b>	
Ethernet	10/100/1000 Base-T MAC (External Phy required)
Analog and Digital I/O	GPIO, I²C, I²S, SPI, UART, PWM, SDIO, USB 2.0, JTAG, Analog Input

SAMSUNG ELECTRONICS RESERVES THE RIGHT TO CHANGE PRODUCTS, INFORMATION AND SPECIFICATIONS WITHOUT NOTICE.

Products and specifications discussed herein are for reference purposes only. All information discussed herein is provided on an "AS IS" basis, without warranties of any kind. This document and all information discussed herein remain the sole and exclusive property of Samsung Electronics. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted by one party to the other party under this document, by implication, estoppel or otherwise. Samsung products are not intended for use in life support, critical care, medical, safety equipment, or similar applications where product failure could result in loss of life or personal or physical harm, or any military or defense application, or any governmental procurement to which special terms or provisions may apply. For updates or additional information about Samsung products, contact your nearest Samsung office. All brand names, trademarks and registered trademarks belong to their respective owners.

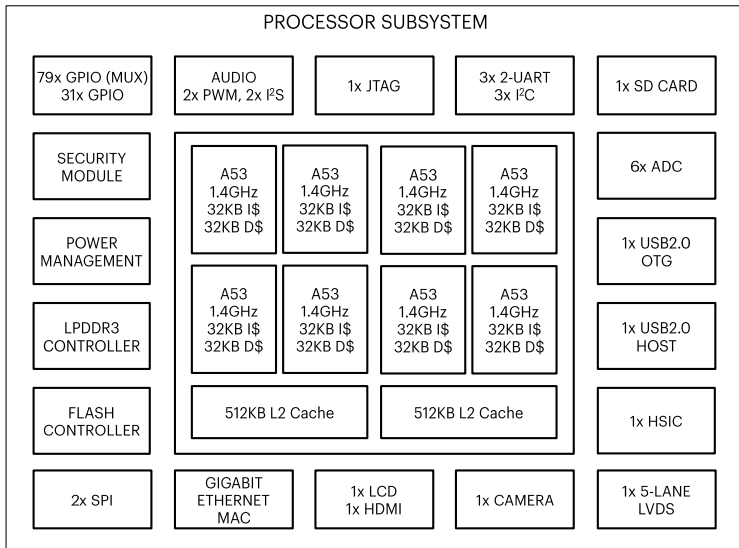

ARTIK 710 Module Processor Sub System


<b>Processors</b>	Octa core ARM® Cortex®A53@1.4GHz 32KB I\$ and 32KB D\$ per core Shared 2x512KB L2 Cache
<b>Display/Camera</b>	4-lane MIPI DSI up to FHD, LVDS, HDMI 4-lane MIPI CSI up to 5MP
<b>DMC</b>	Support for SRAM/NOR/ROM Uses DDR3 interface@800MHz
<b>External Peripherals</b>	2xSPI, 3xUART (2-pin) 3xI²C+1xSW I²C, 2xI²S, 2xPWM 6-channel ADC, 31xGPIO (Dedicated), 79xGPIO (Multiplexed)
<b>Multi Media</b>	Multi Format Codec 3D graphics accelerator JPEG Codec
<b>High Speed Interfaces</b>	1xUSB2.0 Host, 1xUSB2.0-OTG, 1x HSIC, 1xEthernet 10/100/1000 MAC, 4-channel SD/SDIO eMMC5.0
<b>Security</b>	Secure Hash

## ARTIK 710 MODULE SECURITY FEATURES

Samsung considers world class security as one of the most important requirements when integrating IoT nodes and data into the cloud. To assure a secure environment for all IoT nodes, the ARTIK family has dedicated security hardware and software components in place, from the module, integrated into the operating system and in the cloud.

Every ARTIK 710 Module has the ability to authenticate its boot image using a secure hash and execute a secure boot once the boot image has been authenticated. Secure communication and key management is facilitated by the Secure Element as part of any ARTIK 710 Module. Finally, secure execution can be performed in Trustonic’s Trusted Execution Environment (TEE) using ARM® TrustZone®.

The ARTIK 710 Module software stack as described facilitates total security starting from authenticated adoption of an IoT node into the cloud to secure communication and remote software updates.

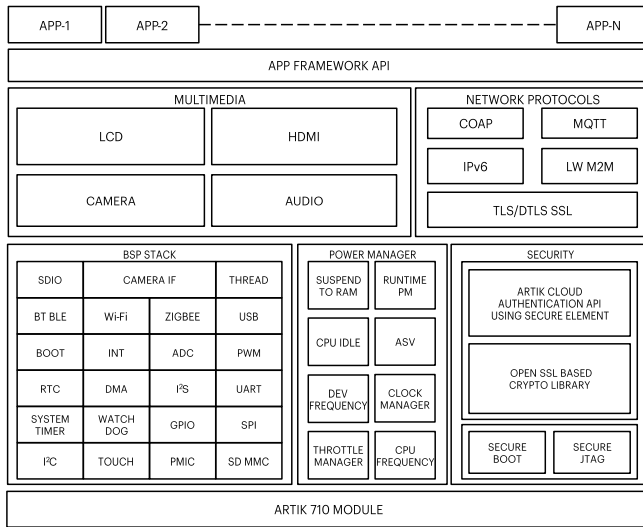

ARTIK 710 Module Software Stack

Samsung’s commitment to security gives developers the ability to create secure user experiences using the ARTIK 710 Module.

## ARTIK 710 MODULE ORDERING INFORMATION

For volume ordering of evaluation kits, please contact a sales representative in your area or email [sales@artik.io](mailto:sales@artik.io).